

Wall-mounted DALI dimmer

09.240TL.04086




Important: Read All Instructions Prior to Installation

Function introduction

Lamp 1:
Click to recall the first lamp,
Press and hold down to increase/
decrease light intensity Dimming
range from 0.1% to 100%


Lamp 2:
Click to recall the second lamp,
Press and hold down to increase/
decrease light intensity Dimming
range from 0.1% to 100%

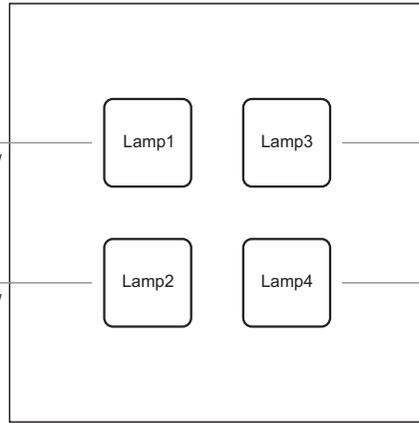

Front side

Lamp 3:
Click to recall the third lamp
Press and hold down to increase/
decrease light intensity Dimming
range from 0.1% to 100%

Lamp 4:
Click to recall the fourth lamp
Press and hold down to increase/
decrease light intensity Dimming
range from 0.1% to 100%

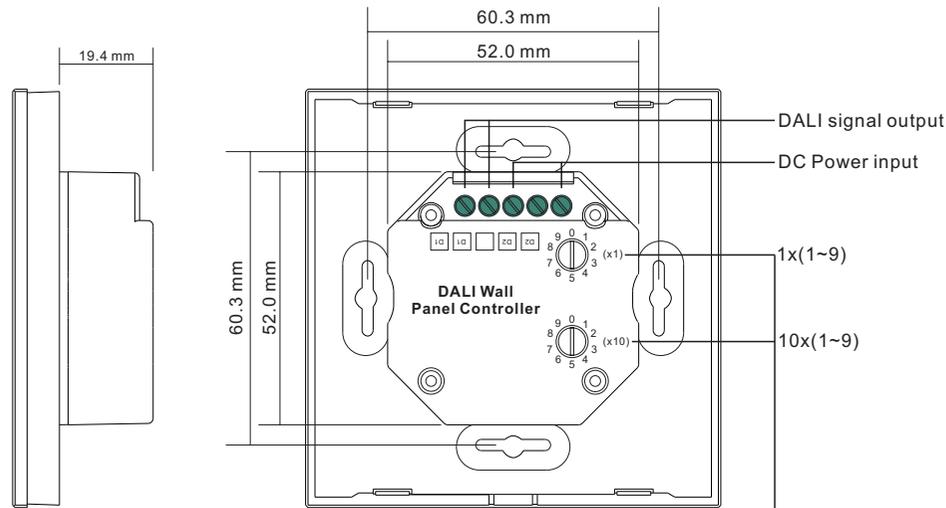

Back side

Set the The starting DALI address Number

Product Data


Output Signal	DALI signal
Power Supply	Provided by DALI bus
Power consumption	4 mA
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	86x86x29.1mm

- Touch sensitive
- Glass interface(white & black)
- Comply to DALI standard protocol IEC 62386-102,IEC 62386-207 and in compliance with DALI products from other international incorporation.
- With bus detective function, one channel DALI bus can install multiple dimmer switches.
- Enable to select 4 different lamp addresses for controlling by encoding switch.
- Waterproof grade: IP20

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Wiring diagram

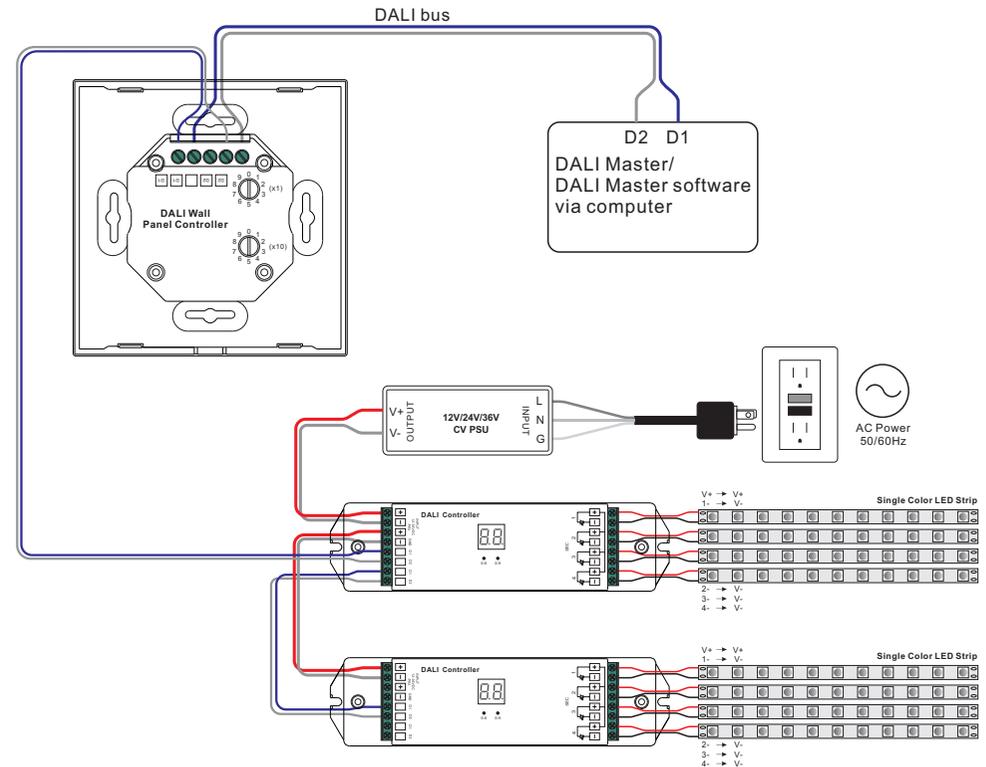

Operation

Set starting DALI address number for DALI masters

1. Set the starting number "X" on the DALI controller (with 64 DALI addresses)
2. **Lamp 1** control X DALI address, **Lamp 2** control X+1 DALI address, **Lamp 3** control X+2 DALI address, **Lamp 4** control X+3 DALI address

Installation

