


AC Triac RF Switch



70020018

Important: Read All Instructions Prior to Installation
Function introduction

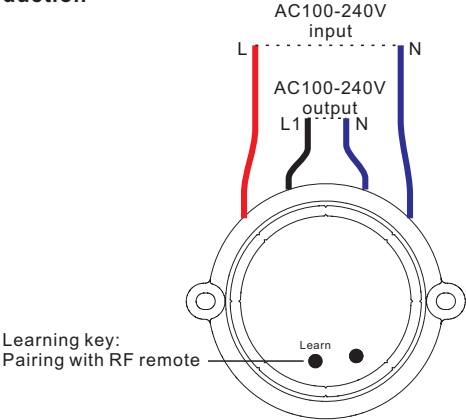

Product Data

Input Voltage	Output Voltage	Output Current	Output Power	Size(Φxh)
100-240VAC	100-240VAC	1x0.45A max	1x100W max	46.5x19.5mm

- Radio Frequency : 868/869.5/916.5/434mhz
- Waterproof grade: IP20

- Safe and reliable full isolation design
- Great compatibility with a variety of remote controls
- To switch on/off single color LED lamps, traditional incandescent and halogen lights


Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.


Compatible Load Types			
Load Symbol	Load Type	Maximum Load	Remarks
	LED lamps with transformers	50W @ 230V 25W @ 110V	Due to variety of LED lamp designs, maximum number of LED lamps is further dependent on power factor result when connected to switch.
	LED drivers	50W @ 230V 25W @ 110V	Maximum permitted number of drivers is 50W divided by driver nameplate power rating.
	Incandescent lighting, HV Halogen lamps	100W @ 230V 50W @ 110V	
	Low voltage halogen lighting with electronic transformers	50W @ 230V 25W @ 110V	

Wiring diagram

(1)With built-in driver LED light

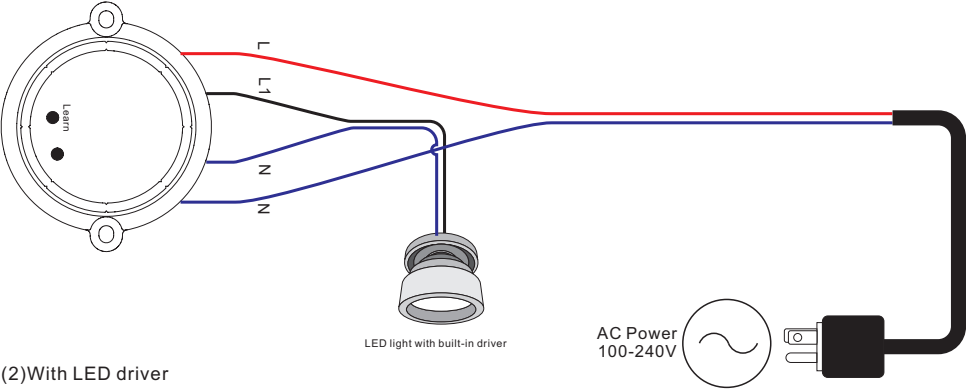

(2)With LED driver

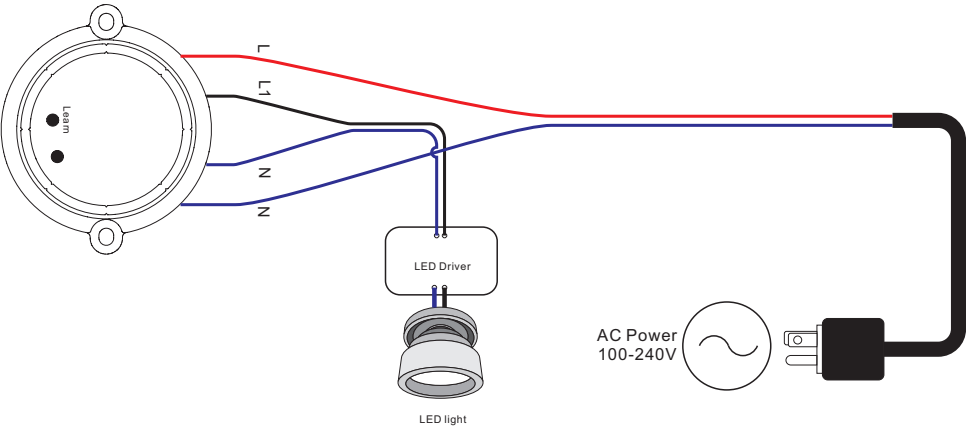

Pair/delete the pairing with RF remote

- 1.Do wiring according to connection diagram.
- 2.Pair RF Receiver with RF remote: please refer to the instruction of the remote that you would like to pair with.
- 3.Delete the pairing:
 - (1)Wire up the RF receiver correctly, power on.
 - (2)Press and hold down the “ **Learning Key** ” button on receiver for over 3 seconds until the connected light flashes, which means well deleted.

Product Dimension

