


# DALI D4i LED Controller(500-1650mA)

**Important:** Read All Instructions Prior to Installation

## Function introduction

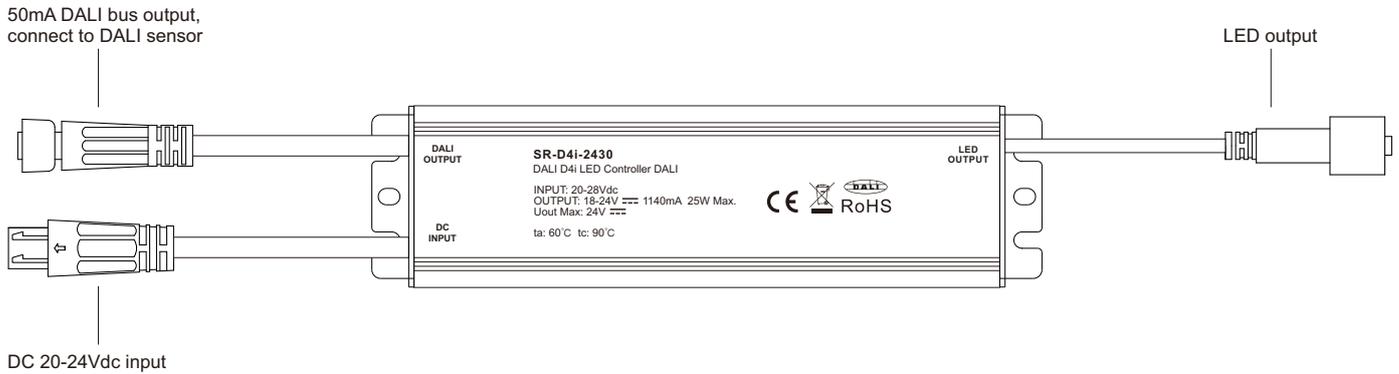

## Product Data


Input Voltage	Output Voltage	Output Current	Output DALI bus power	Output Power	Remarks	Working Temperature	Product Size
20-28VDC	18-24VDC	500-1650mA settable in factory	50mA	40W max.	Constant current	-35°C - 65°C	154.4x42.2x29mm

- In compliance with IEC 62386-101:2014, IEC 62386-102:2014, IEC 62386-207 Ed2.
- Built-in DALI-2 interface, DALI DT6 device
- Match all DALI systems in the market
- 1 DALI address input, 1 channel PWM output
- Built-in 50mA DALI bus power
- Output current 500-1650mA can be set in factory
- Built-in boost circuit allows the controller to operate normally even when the battery voltage is unstable.
- Quick connector for easy wiring.
- IP67 waterproof grade

## Safety & Warnings

- Installation must be done with the power off.
- Unauthorized disassembly of the product is prohibited to avoid voiding the warranty.
- Do not expose to burning or heat sources.

## Wiring Diagram

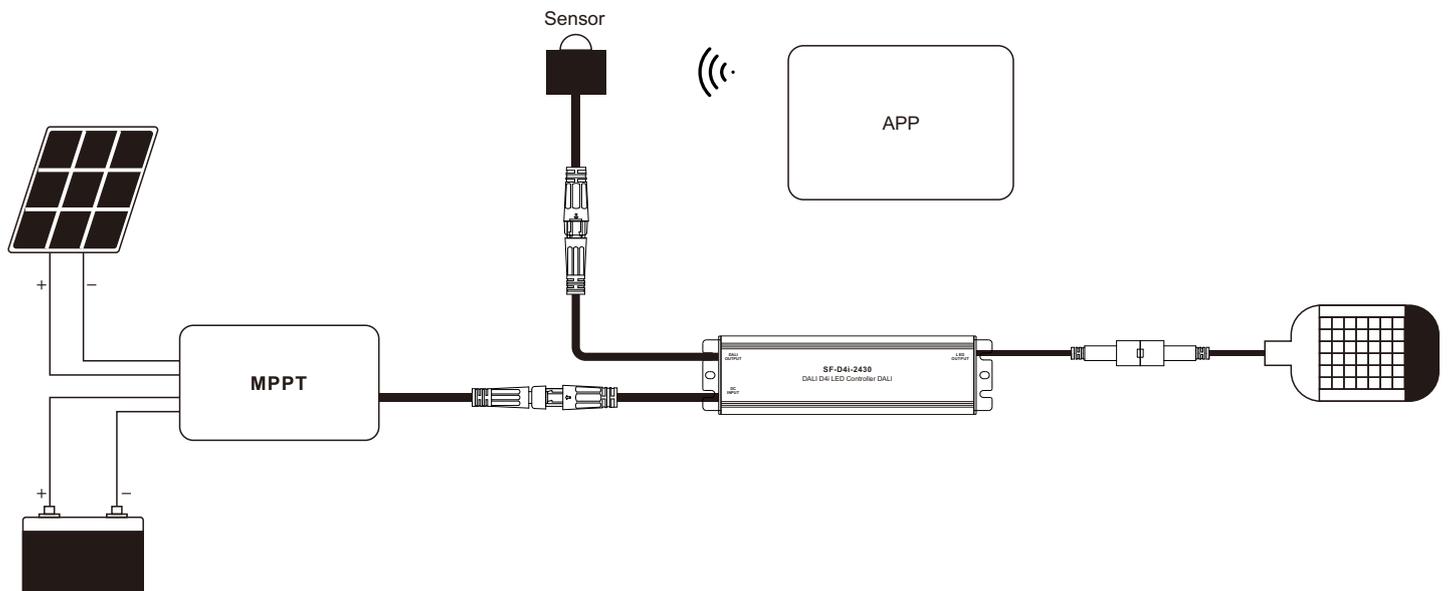

## Product Dimension

