


DALI Dimmer(1 channel)

70040018



Important: Read All Instructions Prior to Installation

Function introduction

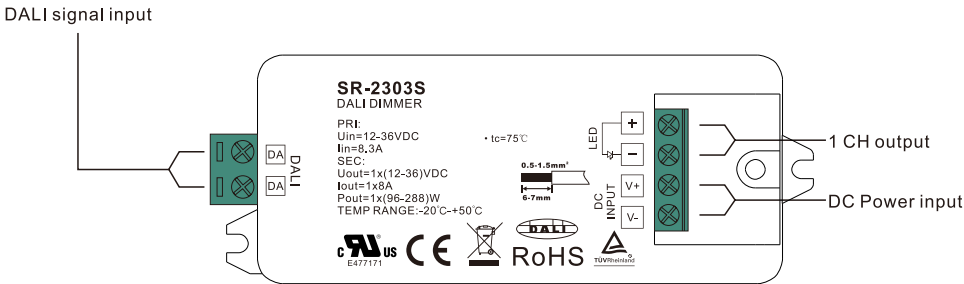

Product Data

No.	Input Voltage	Output Current	Output Power	Remarks	Size(LxWxH)	DALI Consumption	Dimming Range	Ambient Temperature
1	12-36VDC	1x8A	1x(96-288)W	Constant voltage	95x37x20mm	2mA	0.1%-100%	-20°C ~ +50°C
2	12-36VDC	1x350mA	1x(4.2-12.6)W	Constant current	95x37x20mm	2mA	0.1%-100%	-20°C ~ +50°C
3	12-36VDC	1x700mA	1x(8.4-25.2)W	Constant current	95x37x20mm	2mA	0.1%-100%	-20°C ~ +50°C

- In compliance with IEC 62386-101:2014, IEC 62386-102:2014, IEC 62386-207 Ed2.
- Built-in DALI-2 interface, DALI DT6 device
- Match all DALI systems in the market
- 1 DALI address input, 1 channel PWM output

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.


Operation

Do wiring according to connection diagram.

DALI Address Assigned by DALI Masters

This product is designed with 1 DALI address input and 1 channel output, DALI address is assigned by DALI Master controller automatically, please refer to user manuals of compatible DALI Masters for specific operations.

Wiring Diagram

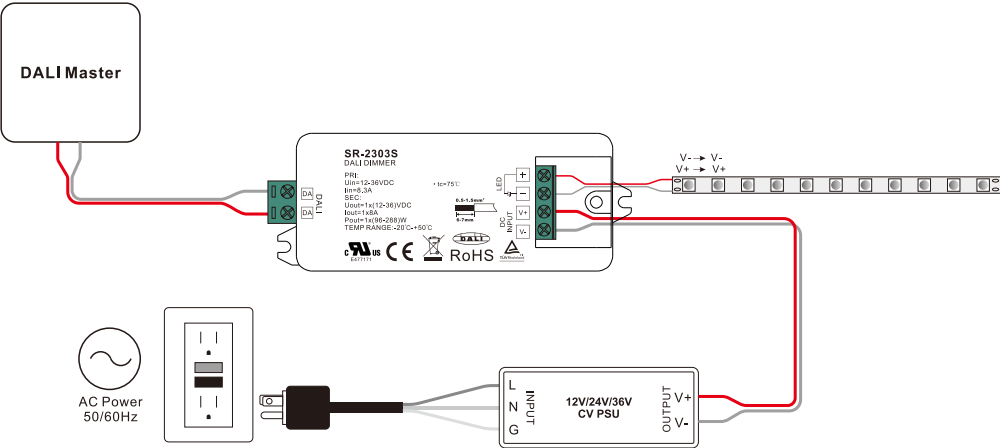

Conformity & Standards

- Radio Frequency Interference according to EN 55015:2013
- Immunity standard according to EN 61547:2009
- TÜV Rheinland marked, CE marked

Product Dimension

