


Dual Color DMX512+RF Controller

09.280BDRF.04188




Important: Read All Instructions Prior to Installation

Function introduction

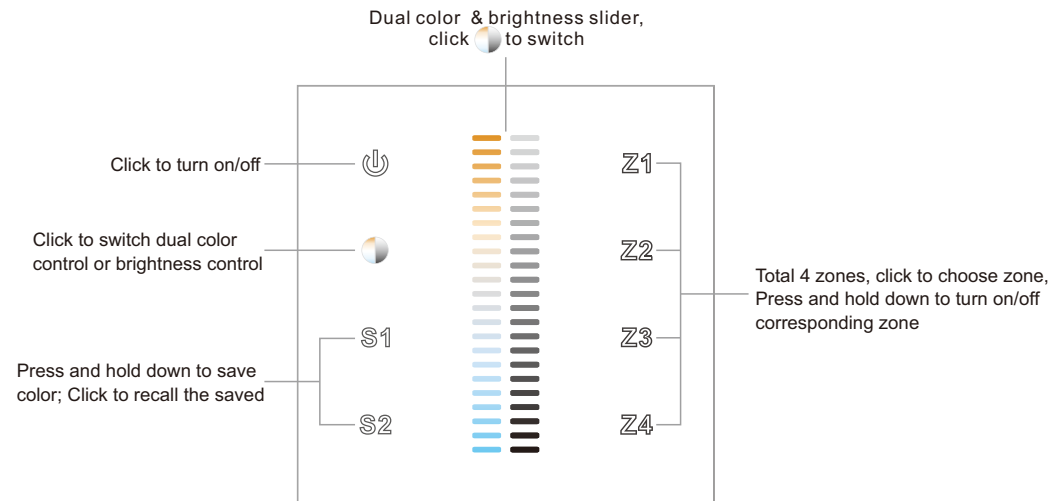

Front side

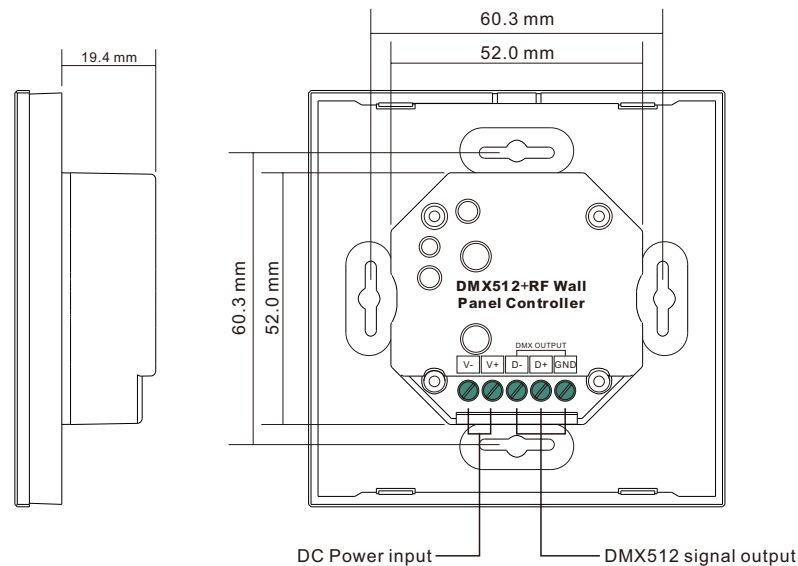

Back side


Product Data

Output Signal	DMX512+RF signal
Power Supply	12-24VDC
Power consumption	< 20 mA
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	86x86x29.1mm

- Touch sensitive
- Glass interface(white & black)
- Standard DMX512+RF Signal output
- Radio frequency: 869.5/434MHz
- Control CCT color
- Control 4 zones synchronously and separately
- Waterproof grade: Ip20

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

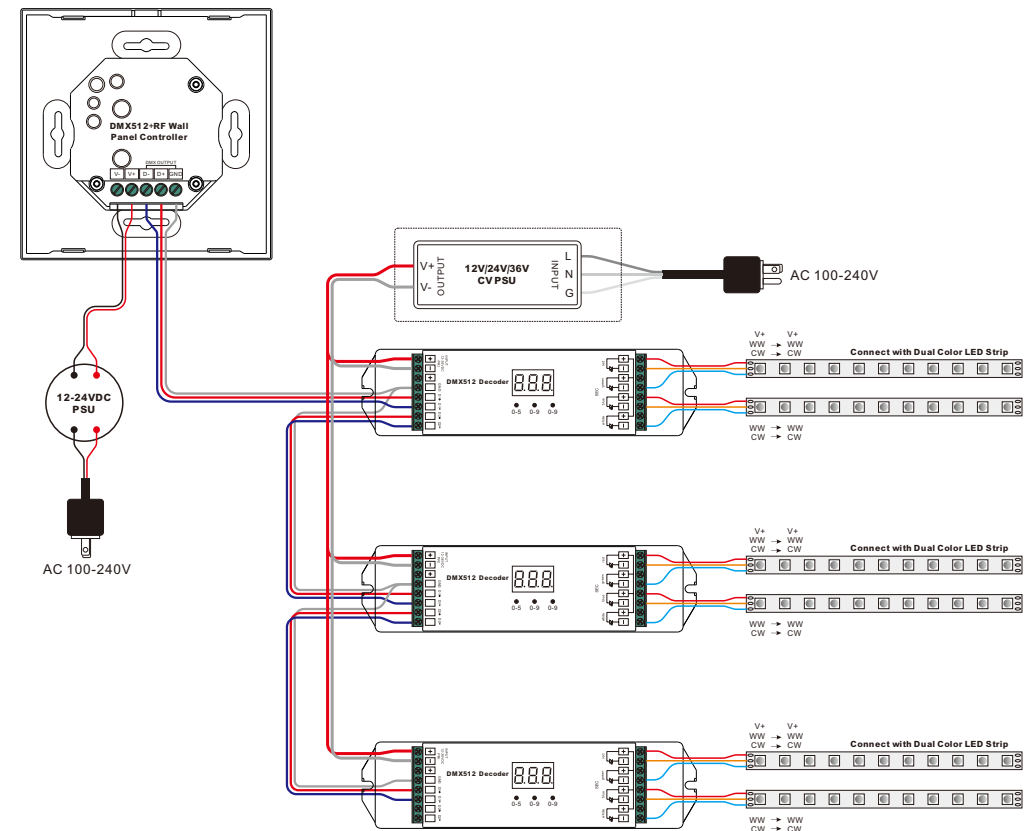


Set DMX Address

This DMX master controller controls 4 zones of DMX decoders by setting DMX decoders' address as follows:
 DMX decoders with address 001 will be controlled by zone 1,
 DMX decoders with address 005 will be controlled by zone 2,
 DMX decoders with address 009 will be controlled by zone 3,
 DMX decoders with address 013 will be controlled by zone 4.

Pair with RF receiver

1. Do wiring the wall panel & RF receiver according to wiring diagram (please refer to the instruction of RF receiver that you would like to pair with)
2. Power on, then touch the button  to turn on the controller, indicator of the controller turned blue




Step 1: Click the "Learning Key" button on RF receiver or re-power on the receiver three times continuously to set it into pairing status

Step 2: Choose and click a zone number(e.g. zone 4)

Step 3: Touch the slider, LED lights connected with the RF receiver flicker once means the receiver is paired with zone 4 successfully.

Save color/scene/mode




Step 1: Choose and click one or multiple paired zone numbers(e.g. zone 1)

Step 2: Touch the slider to select the scene you like

Step 3: Press and hold any scene buttons of **S1/S2**(e.g. **S1**), LED lights connected with the DMX decoder/RF receiver flicker once means the color/scene was saved successfully.

Recall the saved colors/scenes



Step 1: Choose and click one or multiple paired zone numbers(e.g. zone 1)

Step 2: Click any scene buttons of **S1/S2**(e.g. **S1**) to recall the saved scene

Installation

