



RF Wireless Dual Color remote

09.2803c.04750



Important: Read All Instructions Prior to Installation

Function introduction

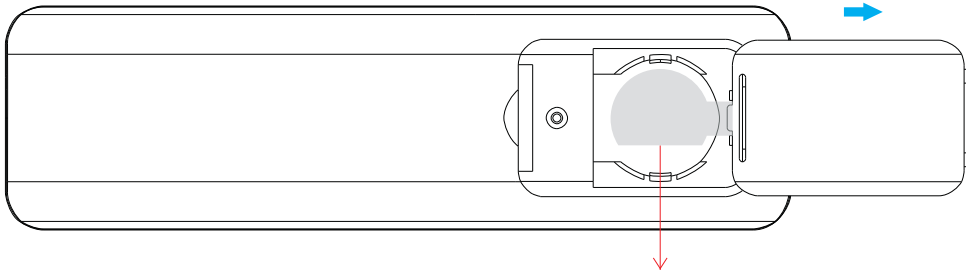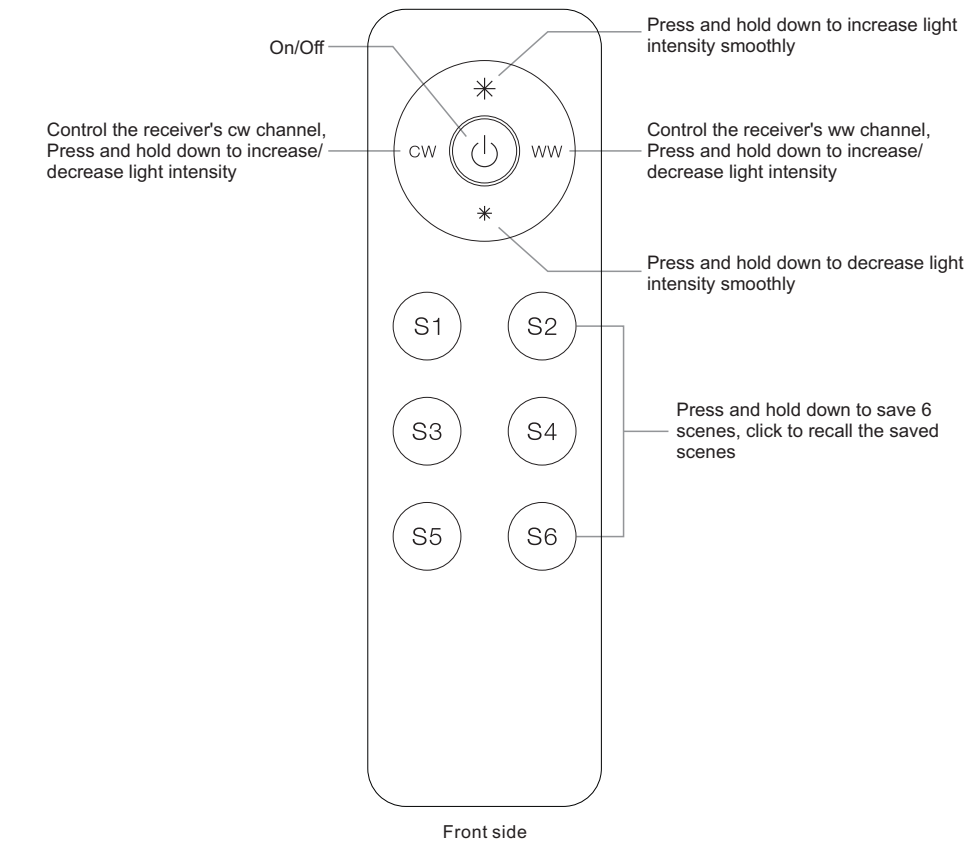

Note:Before the first use, please remove the protective film on the battery.

Back side

Product Data


Output	RF signal
Operation Frequency	868/915/434MHz
Power Supply	3V(1xCR2025 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	136.3x38.9x10.7mm

- Control 1 zone
- Dual color controller
- Compatible with all universal series RF receivers
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20


Safety & Warnings

- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

Pair with RF receiver

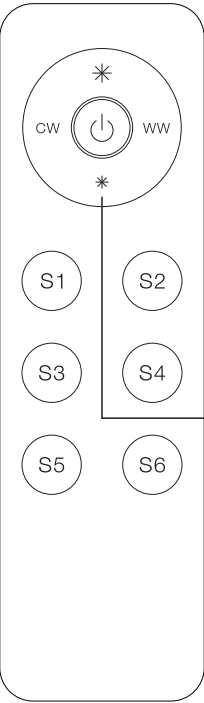

Step 1:Do wiring the RF receiver according to wiring diagram(please refer to the instruction of RF receiver that you would like to pair with.

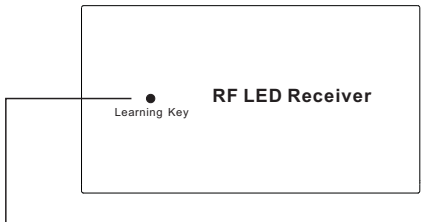

Step 2:Click the "Learning Key" button on RF receiver to set it into pairing status

Step 3:Click any of the four buttons * * CW WW, LED lights connected with the RF receiver flicker once means the receiver is paired with the remote successfully.

Note: one receiver can be paired with max 8 remote controls.

Save scene/color

- Step 1:Operate the remote to select a color
- Step 2:Press and hold down S1/S2/S3/S4/S5/S6 button until the connected LED light with RF receiver blinked, the color/scene was saved successfully

Recall the saved scenes/colors

- Step 1:Click S1/S2/S3/S4/S5/S6 to recall the saved