
RF Dual Color Remote Controller

Important: Read All Instructions Prior to Installation

Function introduction

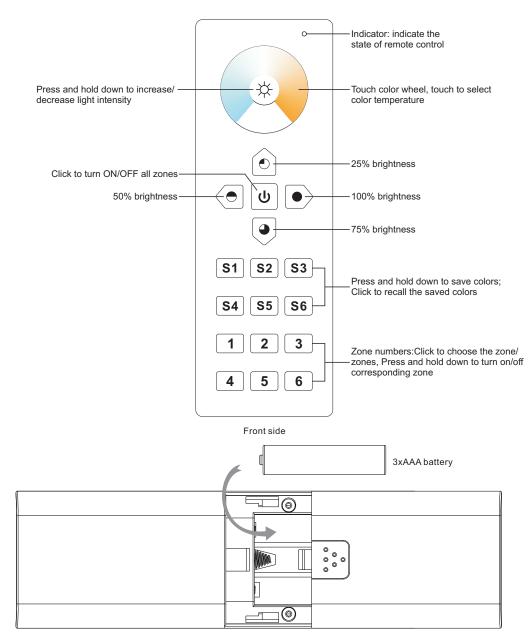

Prod	uct	Data
------	-----	------

09.289CT.04162

Output	RF signal
Operation Frequency	869.5/916.5/434MHz
Power Supply	4.5V(3xAAA battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	140x48x17mm


- Control 6 zones of RF receivers separately.
- CCT color controller
- High sensitive & high stable t, fast & precise color control.
- · Compatible with all universal series RF receivers
- 1 receiver can be paired by max 8 different remote controls. Waterproof grade: IP20

Safety & Warnings


• This device contains AAA batteries that shall be stored and disposed properly.

• DO NOT expose the device to moisture.


Pair with RF receiver(Method 1)

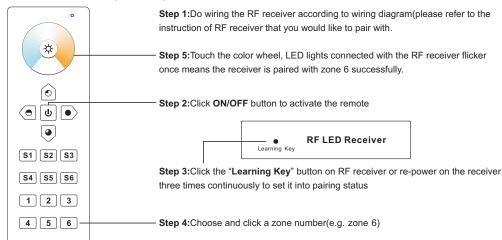


Pair with RF receiver(Method 2)

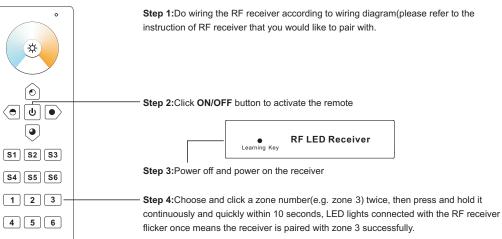

Save color/scene/mode

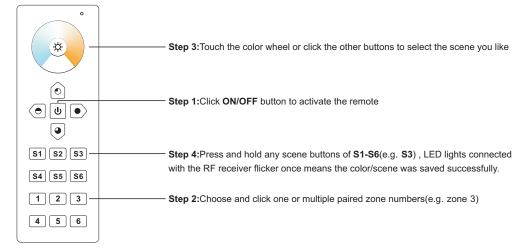

Recall the saved colors/scenes

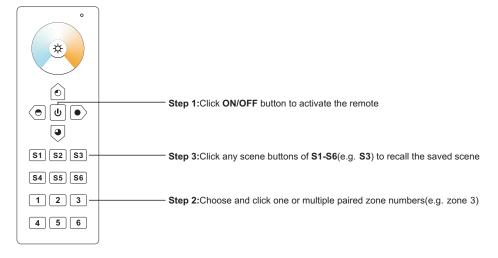

RF LED Receiver

If you use multiple receivers, you have two choices:

Option 1: have all the receivers in the same zone, like zone 1





 \bigcirc

RF remote

Option 2: have each receiver in a different zone, like zone 1, 2, 3 or 4



RF remote