

Work with Sunsmart

0-10V BLE Fixture-integrated Sensor-less Controller

SR-BL9032A-V

Features

- Bluetooth to 0-10V signal converter, Bluetooth® mesh network
- Built-in 20mA 0-10V signal output
- Mesh network, which has a much longer control distance, transmits received signals to neighboring devices
- All devices on 0-10V line are broadcast controlled
- Supporting our kinetic energy switches and EnOcean switches EWSSB and EWSDB
- In typical indoor environment, the typical range for wireless communication is 20m to 25m. Actual range is dependent on field installation.
- · On-board antenna
- · Waterproof grade: IP20
- 5 years warranty






Parameters

Input	Power	12-24VDC	
	Signal	Bluetooth	
Output, 0/1-10V	Current	Max. 20mA	
Control	Dimming Curve	Logarithmic	
Environment	Dimming Method	PWM	
	Operating Temperature	0°C~+45°C	
2	Relative Humidity	8% to 80%	
Others	Size	See dimensions	

Product info



Reset Key: Press it to help withdraw the device from internet/APP, LED flashes quickly indicates success.

Note: V+: Power supply, GND: Common port for V- & Dim- , DIM+: 0-10V signal port, represents 10V

Warning


- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.




0-10V BLE Fixture-integrated Sensor-less Controller

SR-BL9032A-V

Dimension

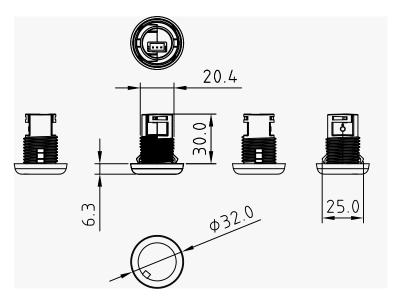

Wiring

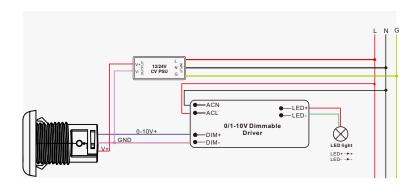

Operation


- Do wiring according to connection diagram.
- Kindly refer to "Sunsmart User Manual" for further pairing.
- Press and hold down the "Reset" button on the controller over 5 seconds until the indicator flashes, which means it has been reset.

Work with Sunsmart



Application

0-10V BLE Fixture-Intergrated Sensor-less Controller

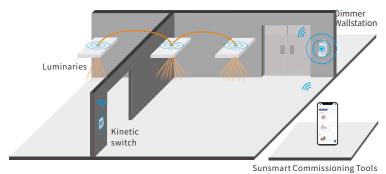

Specification LINKAGE

- Free to link several zones which acts like zone linking
- Free to set linkage conditions (A triggers B or B triggers A)
- Work with Sensor node can realize maxmium costeffective ratio

ENERGY SAVINGS

- Low/High-end trimming
- Manual control
- Auto and advanced demand response programs
- In-node Scheduling (INS)
 Function

COMFORT & CONVENIENCE

- Personalized setting profile
- Working with kinetic switch and
 0-10V dimmable drivers
- Multi-scenes control

ENVIRONMENT & APPROBATION

- Operating temperature: 0°C to 45°C
- Agency approbations: UL Listed /FCC/ CE/ IC...
- Warranty: 5 years



0-10V BLE Fixture-integrated Sensor-less Controller

SR-BL9032A-V

Statement

FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment offand on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -- Reorient or relocate the receiving antenna.
- -- Increase the separation between the equipment and receiver.
- -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC STATEMENT

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

(1) This device may not cause interference; and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

 $(1) \ l'appareil \ ne \ doit \ pas \ produire \ de \ brouillage, et \ (2) \ l'utilisateur \ de \ l'appareil \ doit \ accepter tout \ brouillage \ radio\'electrique \ subi, \ m\^eme \ si \ le \ brouillage \ est \ susceptible \ d'en \ compromettre \ le \ fonctionnement.$

Update Log

Date	Version	Update Content	Update by
2024-10-10	V1.0	Initial release	Jesse



Subject to change without notice. Please contact us if you have any questions.

Work with Sunsmart

