


4 Channels DALI IoT Gateway



Important: Read All Instructions Prior to Installation

Function Introduction

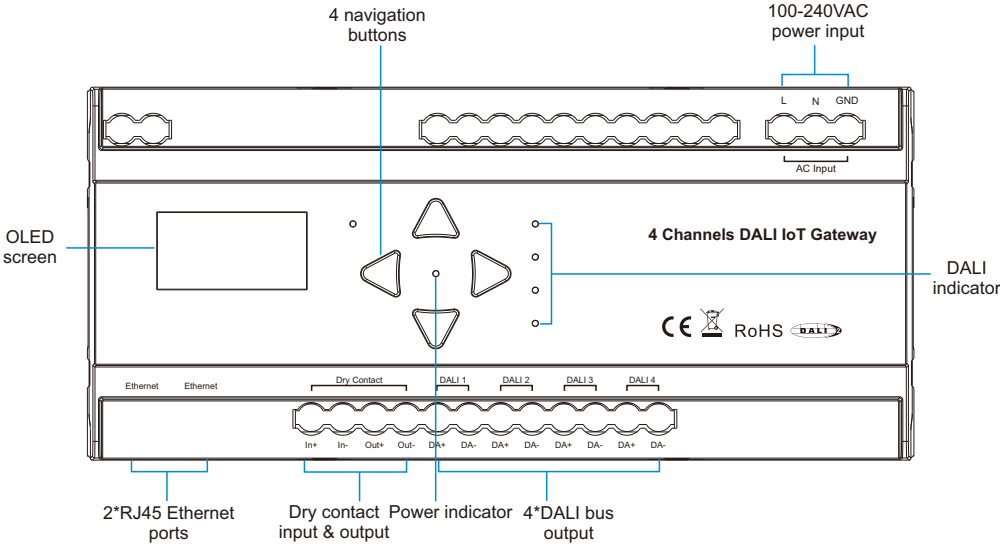

Product Data


Input Voltage	Number of DALI Channel	Output Voltage	Output Current	Size(LxWxH)	Ambient Temperature
100-240VAC	4	12-22.5VDC	Guaranteed supply current: 230mA/ch Max. supply current: 250mA/ch	200x90x66.4mm	-20°C ~ +50°C

- 4 channels DALI IOT gateway
- Supports DT6, DT8 Tc, DT8 XY, DT8 RGBWA device types
- Supports DALI-2 emergency lighting
- Supports DALI-2 push button and rotary panel, DALI-2 motion and daylight sensor
- With OLED screen and navigation buttons for menu operations
- Each DALI bus with max. 250mA DALI bus current output
- Supports 4*64 DALI control gears + 4*64 DALI input devices
- Commissioning via DALI Center platform
- Supports group, scene, and automation
- 1 channel dry contact input & 1 channel dry contact output
- Support MQTT, API, BACnet protocols for BMS integrated
- Waterproof grade: IP20


Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Wiring Diagram

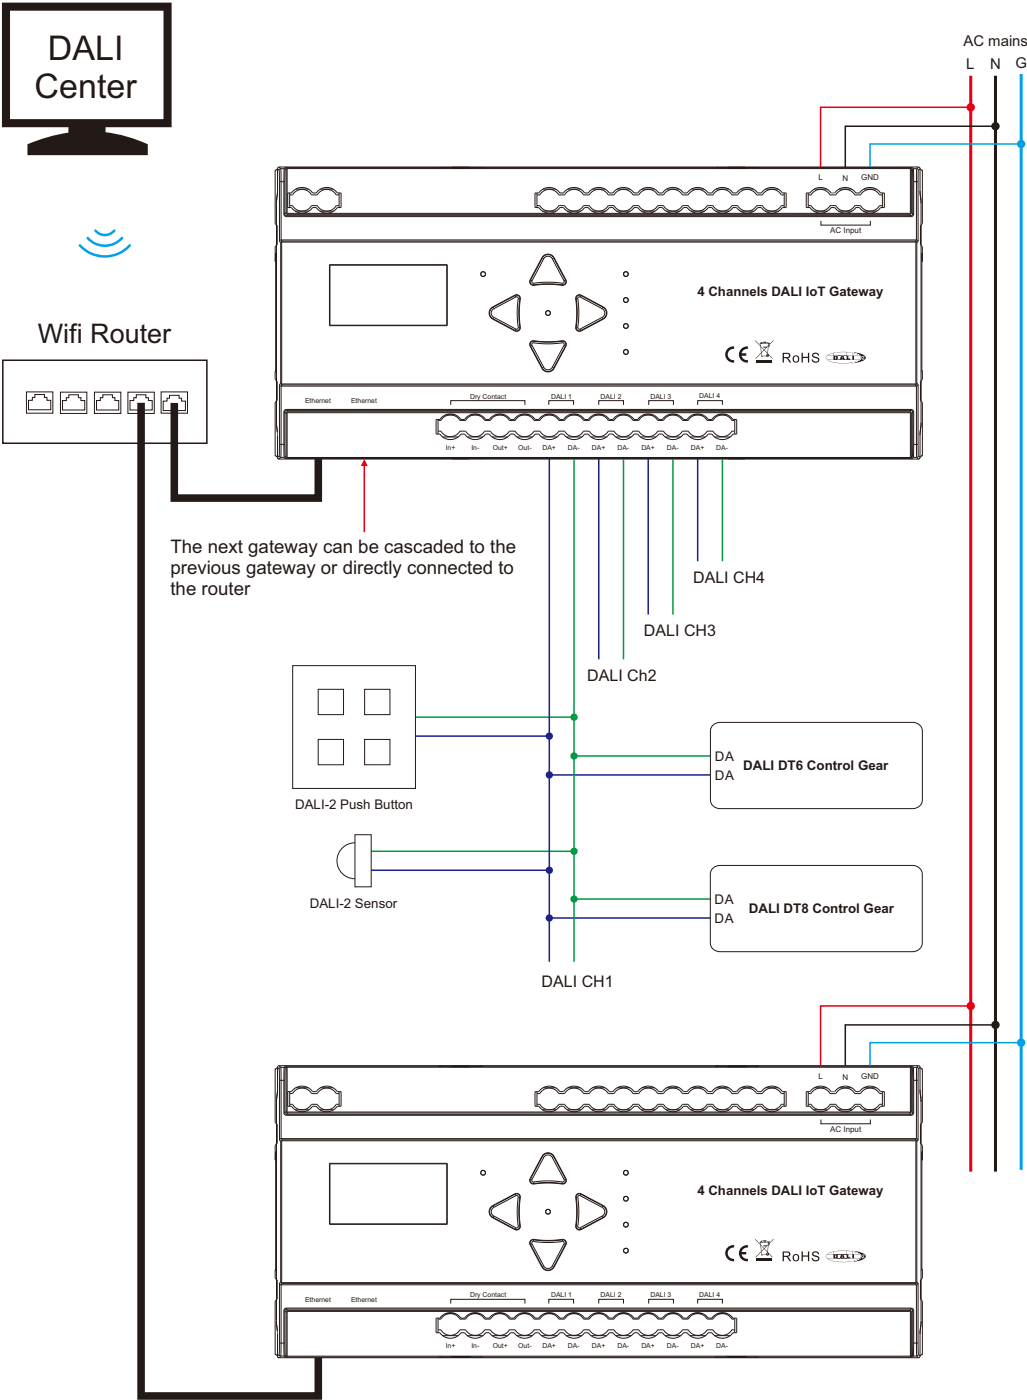

OLED Display Screen Menu Operation Instructions

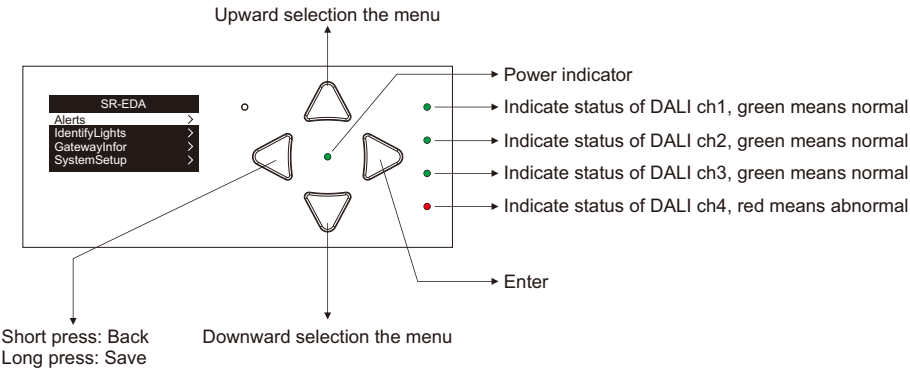

Product Dimension

