




INGY to DALI Ceiling Mounted PIR Sensor Controller

SR-IG9030B-PIR-D-BUS


*Support the ELT Function (Need to work with DALI EL Driver)

Features

- INGY to DALI sensor controller
- Wirepas® mesh network
- Mesh network, which has a much longer control distance, transmits received signals to neighboring devices
- Supporting our kinetic energy switches and EnOcean switches EWSSB and EWSDb
- Autonomos sensor-based control
- Support sensitivity adjustment, Mesh Network, a better method to deal with false trigger
- Available with Magnetic reset (touch reset icon for 5 seconds)
- On-board antenna
- Waterproof grade: IP20, suitable for indoor luminaries
- 5 years warranty



Surface-mounted
(PVC Ceiling/ Plastic ceiling)



Surface-mounted
(Side-Wiring on Concrete/Metal surface)

Parameters

Input & Output Characteristics	
Operating voltage	Powered by DALI BUS
Output	DALI BUS
Current draw	Max. 20mA

Safety & EMC	
EMC standard (EMC)	EN55015, EN61000, EN61547
Safety standard (LVD)	EN60669-1, EN60669-2-1 AS/NZS60669-1/-2-1
RED	EN300328, EN301489-1/-17
Certification	ENEC, CE, RED, UL

Environment Parameters	
Operation temperature	Ta: -10°C ~ +50°C
IP rating	IP20


Sensing	
Movement detection (LB)	Max. ϕ 10-12m @ 3m height
Installation (LB)	2-6m, Max. 6m
Movement detection (HB)	Max. ϕ 26m @ 12m height
Installation (HB)	Max. 12m

Mechanical Data	
Dimension	See below
Material	Flame-retardant/ABS
Protection Class	Class II

Connectors	
Terminal block/Wire size	AC Line: 18 AWG Signal Line: 22 AWG
Wire strip length	10mm

Product info


- 1 Reset icon: Please using magnetic to reset the devices (hold for 5 seconds)

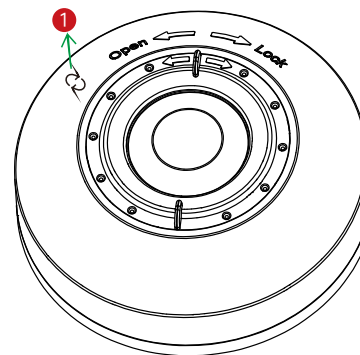

Cable Wiring:

DALI+ (Output) : Yellow, 22 AWG


DALI- (Output) : Blue, 22 AWG

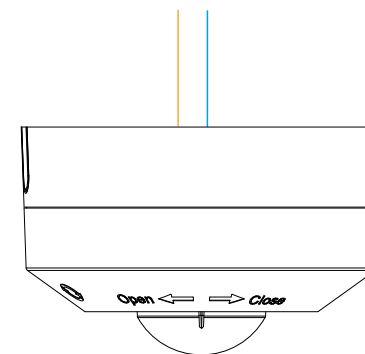


Package info

- 1x **Sensor with Low-bay lens** (Default)
- 1x **High-bay lens** (Free to switch when project required)
- 1x **PIR Lens cover** (Adjust its detection pattern when various application required)
- 1x **A set of screws** (Installation required)

Dimension

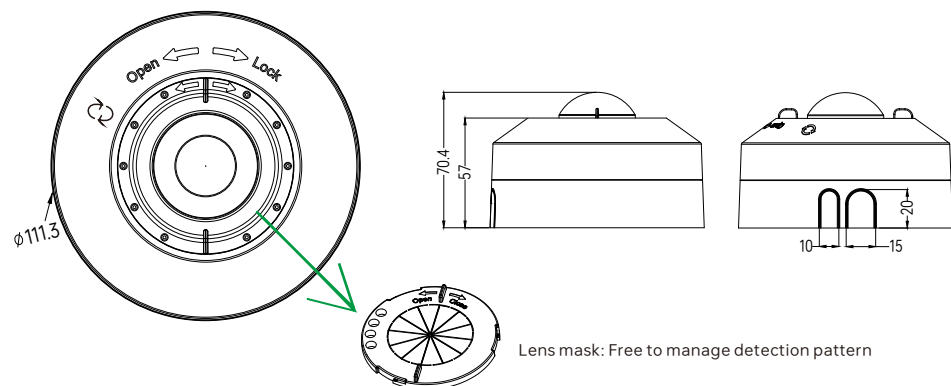


Wiring

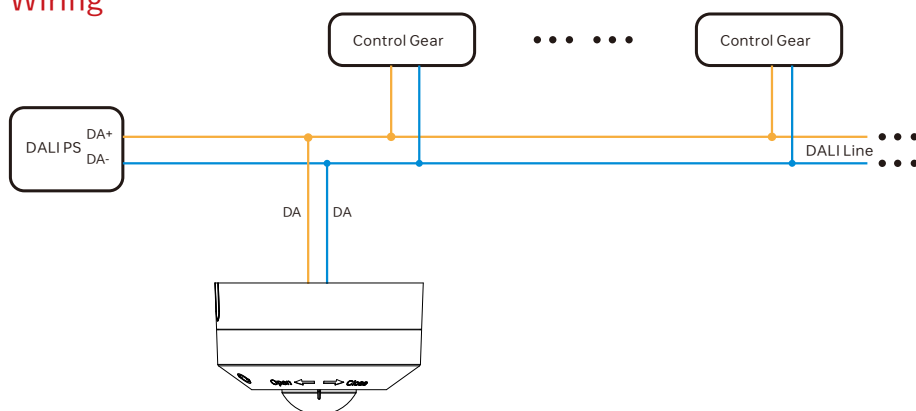

Warning


- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Application

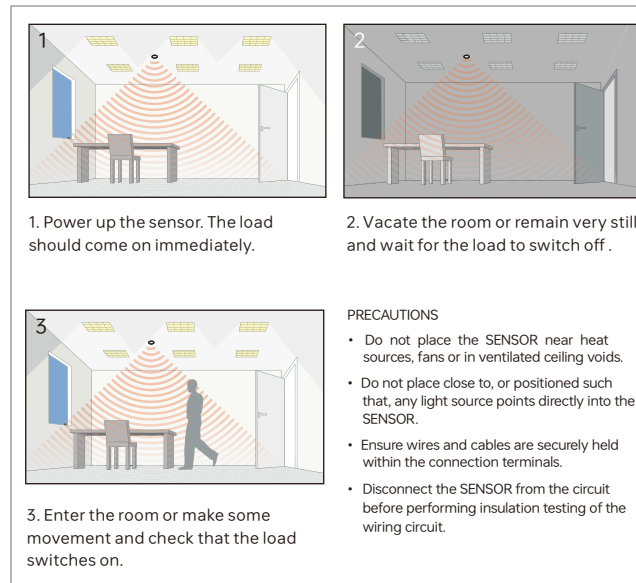


PRECAUTIONS

- Do not place the SENSOR near heat sources, fans or in ventilated ceiling voids.
- Do not place close to, or positioned such that, any light source points directly into the SENSOR.
- Ensure wires and cables are securely held within the connection terminals.
- Disconnect the SENSOR from the circuit before performing insulation testing of the wiring circuit.



Aisle/Corridor application:
Split the lens cover into aisle type.



Semi-sphere application:
Split the lens cover into Semi-circle type.

Specification

ENERGY SAVINGS

- Daylight harvesting
- Occupancy/Vacancy detection


COMFORT & CONVENIENCE

- Advanced occupancy detections
- Personalized setting profile
- Work with kinetic switch keypad

Detection Pattern

With low-bay lens - Cone angle (127°)


Coverage Side View

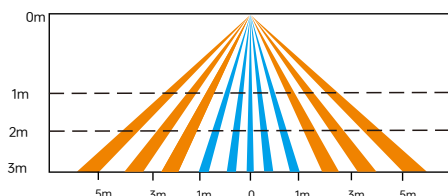


The detection area for movement sensor can be roughly divided into two parts:

- Slow movement (person moving < 1.0/s or 0.3m/s)
- Quick movement (person moving > 1.3/s or 0.4m/s)


Coverage Top View



Default sensitivity: 80% (φ9m at 3m height)



With Corridor Lens Mask:
φ6-9m at 12m height



With Semi-Circular Mask:
Half-detection pattern


Detection Area

Note:

- 1) Following different detection areas are based on different installation heights & patterns.
- 2) Detection Pattern is a relevant value, the performance should depends on the site conditions (installation height/ temperature/ sunlight/ humidity/ blind area...etc)

With high-bay lens - Cone angle (98°)


Coverage Side View

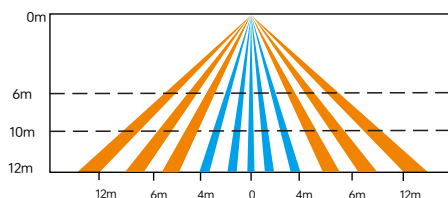


The detection area for movement sensor can be roughly divided into two parts:

- Slow movement (person moving < 1.0/s or 0.3m/s)
- Quick movement (person moving > 1.3/s or 0.4m/s)


Coverage Top View



Default sensitivity: 80% (φ23m at 12m height)



Low-bay lens detection pattern at 3m




High-bay lens detection pattern at 12m

*** This product comes with a pre-mounted low-bay lens (default) and an extra free high-bay lens. Install the lens that best fits your detection needs.**



INGY to DALI Ceiling Mounted PIR Sensor Controller
SR-IG9030B-PIR-D-BUS

Place/Detection instruction

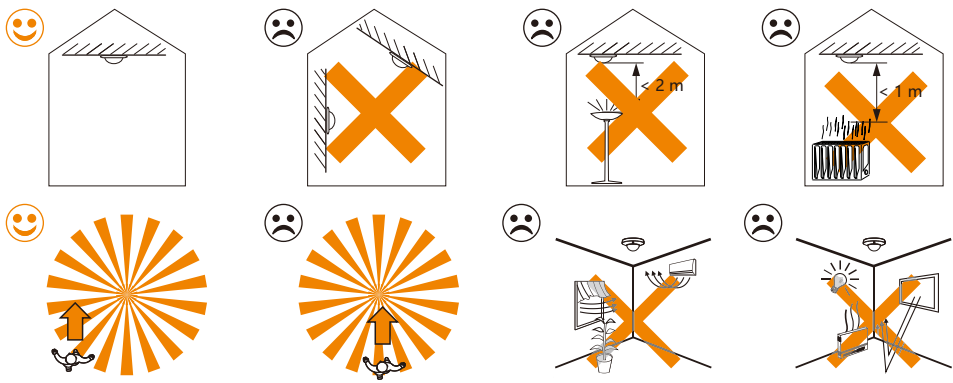

Installation Precautions

- Avoid areas with frequent temperature changes: Keep away from air conditioners, fans, refrigerators, ovens, and other objects that cause rapid temperature changes. The detection effectiveness of PIR motion sensors is closely related to temperature fluctuations, and vents or heat sources can lead to false alarms.
- Avoid areas with significant air flow.
- Avoid facing glass doors and windows directly: 1) Do not face glass doors and windows directly to avoid interference from strong light. 2) Avoid complex environments outside doors and windows, such as direct sunlight, crowds, and moving vehicles.
- Avoid installing opposite large, constantly moving objects: Large objects with significant motion can cause sudden changes in airflow within the detection area, leading to false alarms. Outdoor PIR motion sensors should not be installed opposite large trees or tall bushes.
- Avoid areas with screens, furniture, large potted plants, or other obstacles within the detection range.
- Avoid areas exposed to direct sunlight.

Update Log

Date	Version	Update Content	Update by
2025-11-17	V1.0	Initial Version	Romeo



Subject to change without notice. Please contact us if you have any questions.