



INGY 0-10V Fixture-integrated PIR Sensor Controller

SR-IG9035A-PIR-V

Features

- INGY to 0-10V signal PIR sensor controller, Wirepas® mesh network
- Built-in 20mA 0-10V signal output
- Mesh network, which has a much longer control distance, transmits received signals to neighboring devices
- All devices on 0-10V line are broadcast controlled by mobile application
- Supporting our kinetic energy switches and EnOcean switches EWSSB and EWSDB
- In typical indoor environment, the typical range for wireless communication is 20m to 25m . Actual range is dependent on field installation.
- Standby power consumption less than 0.5W, meet latest ERP regulation
- Available with Magnetic reset (Touch the top part of sensor for 5 seconds)*
- Support sensitivity adjustment, Mesh Network, a better method to deal with false trigger
- On-board antenna
- Waterproof grade: Ip20
- 5 years warranty




* Magnetic Reset



Parameters

Input	Power	12-24VDC
	Signal	Wirepas (INGY)
Output, 0/1-10V	Current	Max. 20mA
Control	Dimming Curve	Logarithmic
	Dimming Method	PWM
Environment	Operating Temperature	0°C~+45°C
	Relative Humidity	8% to 80%
Others	Size	See dimensions

Product info

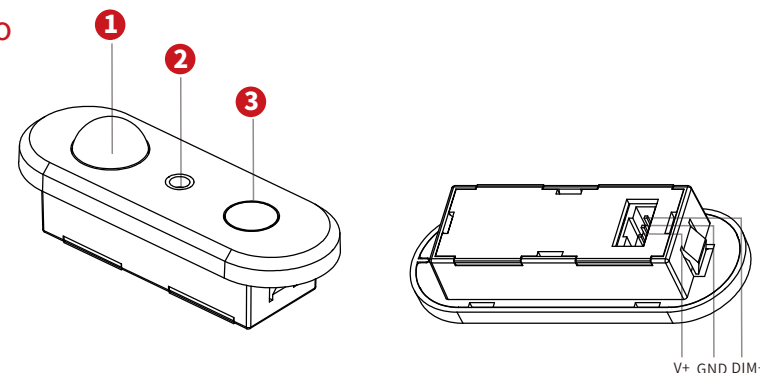

- ① PIR lens
- ② Light sensor: Ambient light detection and daylight harvesting.
- ③ Reset Key: Press it to help withdraw the device from internet/APP, LED flashes quickly indicates success.

Note: V+: Power supply(+), GND: Common port for Power supply(-) & DIM-, DIM+: 0-10V signal port(10V)

Warning


- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.




INGY 0-10V Fixture-integrated PIR Sensor Controller

SR-IG9035A-PIR-V

Dimension

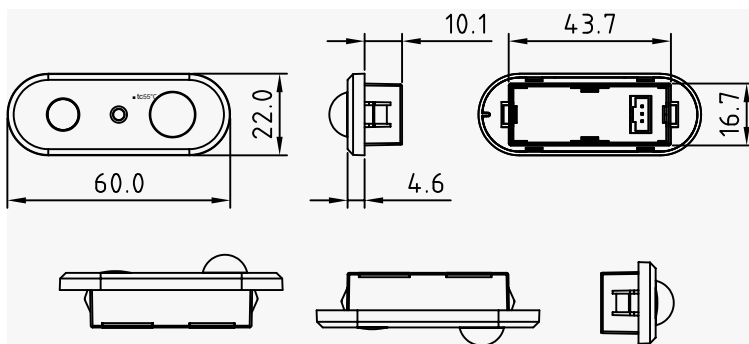

Wiring

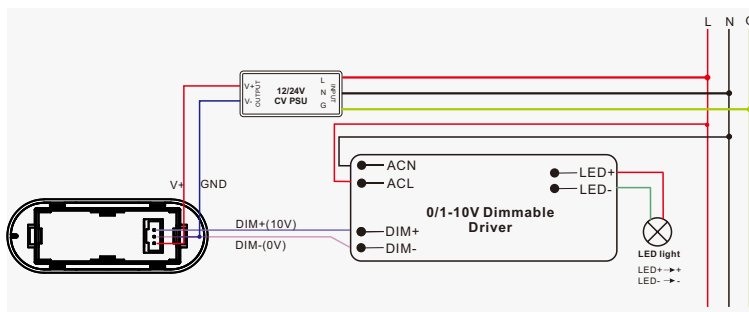


Operation

- Do wiring according to connection diagram.
- Press and hold down the “Reset” button on the controller over 5 seconds until the indicator flashes , which means it has been reset.
- Available with Magnetic reset(Touch the top part of sensor for 5 seconds).



Application

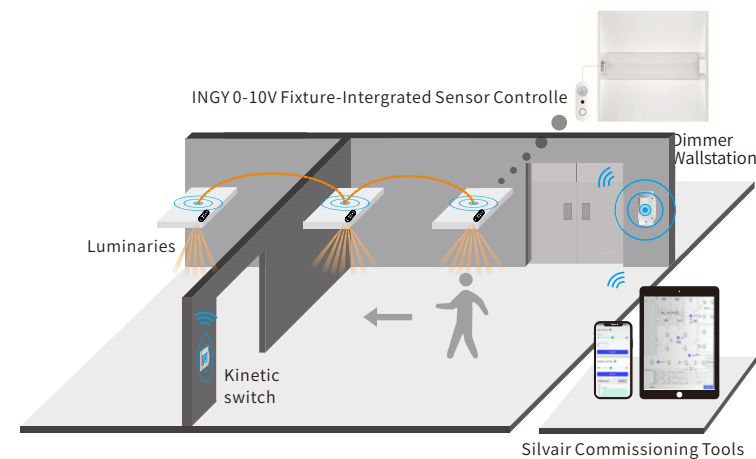

Specification

ENERGY SAVINGS

- Daylight harvesting
- Occupancy/Vacancy detection

COMFORT & CONVENIENCE

- Advanced occupancy detections
- Personalized setting profile
- Work with kinetic switch keypad

SENSING

- Mounting height: 2.5m
- Detection area diameter: 5m @ 2.5m

ENVIRONMENT & APPROBATION


- Operating temperature: 0°C to 45°C
- Agency approbations: UL Listed /FCC/ CE/ IC...
- Warranty: 5 years




INGY 0-10V Fixture-integrated PIR Sensor Controller

SR-IG9035A-PIR-V


Detection Pattern

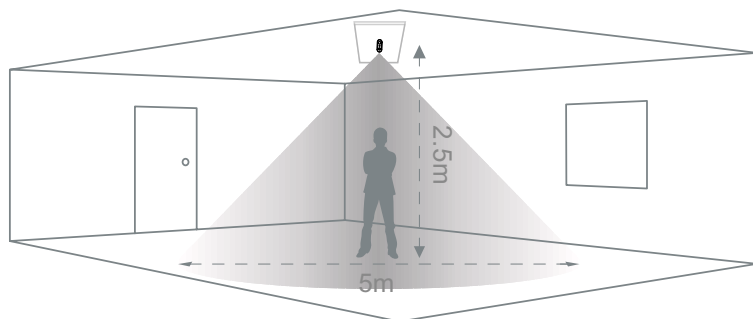

Coverage Side View

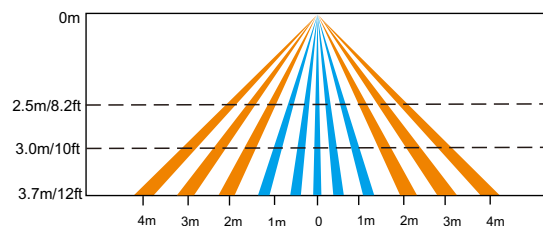

Coverage Top View



The detection area for movement can be roughly divided into two parts:

-  Slow movement (person moving $< 1.0'/s$ or $0.3m/s$)
-  Quick movement (person moving $> 1.3'/s$ or $0.4m/s$)



Installation Precautions

- Avoid areas with frequent temperature changes: Keep away from air conditioners, fans, refrigerators, ovens, and other objects that cause rapid temperature changes. The detection effectiveness of PIR motion sensors is closely related to temperature fluctuations, and vents or heat sources can lead to false alarms.
- Avoid areas with significant air flow.
- Avoid facing glass doors and windows directly: 1) Do not face glass doors and windows directly to avoid interference from strong light. 2) Avoid complex environments outside doors and windows, such as direct sunlight, crowds, and moving vehicles.
- Avoid installing opposite large, constantly moving objects: Large objects with significant motion can cause sudden changes in airflow within the detection area, leading to false alarms. Outdoor PIR motion sensors should not be installed opposite large trees or tall bushes.
- Avoid areas with screens, furniture, large potted plants, or other obstacles within the detection range.
- Avoid areas exposed to direct sunlight.

Update Log

Date	Version	Update Content	Update by
2025-11-17	V1.0	Initial Version	Romeo



Subject to change without notice. Please contact us if you have any questions.