



# **DALI BLE Ceiling Mounted PIR Sensor Controller**

SR-SV9030A-PIR-D

#### **Features**

- DALI BLE ceiling mounted sensor controller, Bluetooth® mesh network
- PIR sensing with daylight haversting function
- Built-in 50mA DALI signal output
- Mesh network, which has a much longer control distance, transmits received signals to neighboring devices
- All devices on DALI line are broadcast controlled by mobile application
- · Supporting our kinetic energy switches and EnOcean switches EWSSB and EWSDB
- In typical indoor environment, the range for wireless communication is 20m to 25m. Actual range is dependent on field installation.
- On-board antenna
- Available with Magnetic reset (Touch the top part of sensor for 5 seconds)
- Waterproof grade: IP20
- 5 years warranty










#### **Parameters**

Input	Power	12-24VDC	
	Signal	Bluetooth	
Output, DALI BUS	Current	Max. 20mA	
Control	Dimming Curve	Logarithmic	
Contract	Dimming Method	PWM	
Environment	Operating Temperature	0°C~+45°C	
	Relative Humidity	8% to 80%	
Others	Size	See dimensions	

## **Product info**

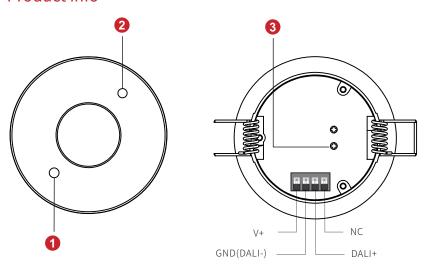


- 1 Light sensor: Ambient light detection and daylight harvesting.
- 2 Presense indicator.
- **3** Reset Key: Long press it to help withdraw the device from the internet/APP LED flashes quickly indicating success.



## **DALI BLE Ceiling Mounted PIR Sensor** Controller

SR-SV9030A-PIR-D

## **Dimension**

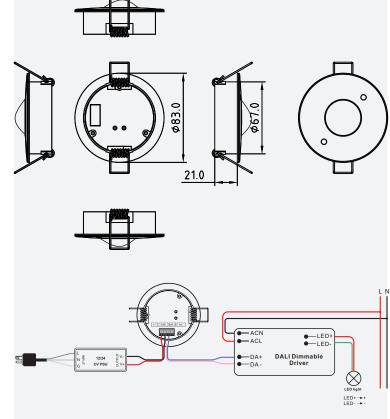

## Operation

Wiring

- Do wiring according to connection diagram.
- Kindly refer to "Silvair Commissioning User Manual" for further
- Press and hold down the "Reset" button on the controller over 5 seconds until the indicator flashes, which means it has been reset.
- Available with Magnetic reset(Touch the top part of sensor for 5 seconds).

#### Warning

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.












## **Application**

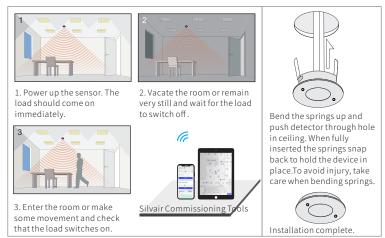

#### **Specification ENERGY SAVINGS**

- Low/High-end trimming
- Daylight harvesting
- Occupancy/Vacancy detection •
- Auto and advanced demand response programs
- · Time-of-Day dimming schedule
- Energy monitoring

#### **SENSING**

- Testing height: 2.5m
- Detection area diameter: 8m@ 2.5m height

#### **COMFORT & CONVENIENCE**

- Advanced occupancy detections
- Light-level stability
- Configurable dim-and-linger occupancy
- Personalized setting profile
- Work with kinetic switch keypad and dimmer wallstation
- Multi-scenes control

#### **ENVIRONMENT & APPROBATION**


- Operating temperature: 0°C to 45°C
- Agency approbations: CE/RoHS/ UL Comming soon...
- Warranty: 5 years




## **DALI BLE Ceiling Mounted PIR Sensor** Controller

SR-SV9030A-PIR-D

## Detection Pattern

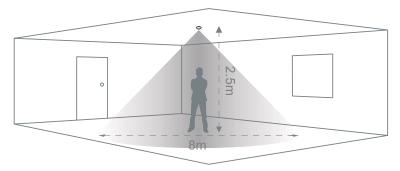

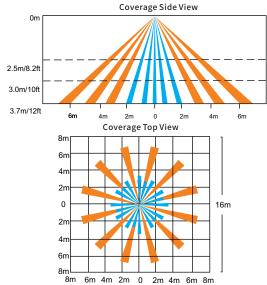

The detection area for movement can be roughly divided into two parts:

Slow movement (person moving < 1.0'/s or 0.3m/s)

Quick movement (person moving > 1.3'/s or 0.4m/s)











# **Precautions**

- **Installation** Avoid areas with frequent temperature changes: Keep away from air conditioners, fans, refrigerators, ovens, and other objects that cause rapid temperature changes. The detection effectiveness of PIR motion sensors is closely related to temperature fluctuations, and vents or heat sources can lead to false alarms.
  - · Avoid areas with significant air flow.
  - Avoid facing glass doors and windows directly: 1) Do not face glass doors and windows directly to avoid interference from strong light. 2) Avoid complex environments outside doors and windows, such as direct sunlight, crowds, and moving vehicles.
  - Avoid installing opposite large, constantly moving objects: Large objects with significant motion can cause sudden changes in airflow within the detection area, leading to false alarms. Outdoor PIR motion sensors should not be installed opposite large trees or tall bushes.
  - Avoid areas with screens, furniture, large potted plants, or other obstacles within the detection range.
  - Avoid areas exposed to direct sunlight.

#### **Update Log**

Date	Version	Update Content	Update by
2022-6-22	V1.1	Input Update	Romeo



Subject to change without notice. Please contact us if you have any questions.