



Technology Partner  
**SILVAIR**

Work with Silvair

# BLE Kinetic Push Button Switch

## SR-SBP2801K4-BLE(US)

### Features


- CCT wall remote based on Bluetooth® Mesh network
- Self-powered wall remote, no battery replacement & re-installation costs
- No wires, no batteries, no limits
- Ultra long lifetime, more than 1 million times pushing
- Easy & quick pairing through APP
- Mesh network for further control distance, receivers can transmit signal to each other
- 2.4 GHz global operation
- Transmission range between every two neighbor devices up to 30m
- Standard size, compatible with existing US size frame
- Working with our BLE driver, controller, signal converter, sensor series product
- On-board antenna
- Waterproof grade: IP20
- 5 years warranty



### Parameters

Protocol	Bluetooth® mesh
Power Supply	Self-powered by built-in nano generator
Transmission Frequency	2.4GHz
Transmission Range(free field)	Min.30m
Protection Type	IP20
Dimming Range	0.1%-100%
Dimensions	44.9x106.2x19.2mm

### Product info

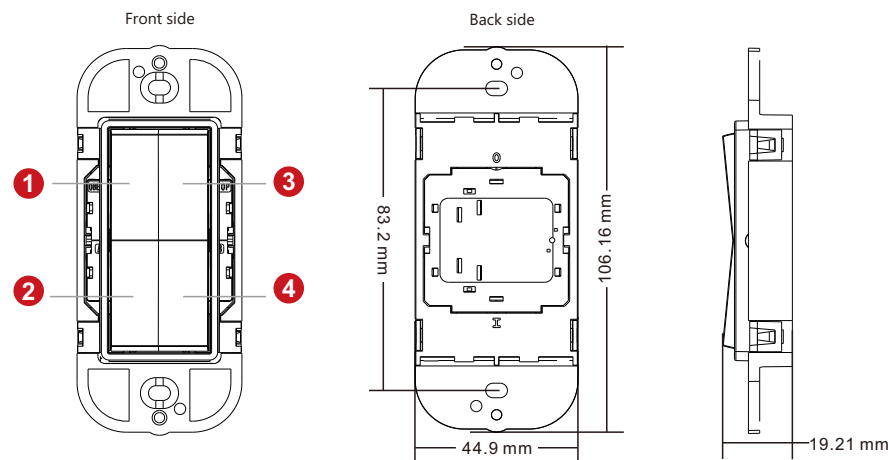

① Click to turn on, press and hold down to increase light intensity.

② Click to turn off, press and hold down to decrease light intensity.

③ CW button: click to recall the scene, press and hold to increase cool white.

④ WW button: click to recall the scene, press and hold to increase warm white.

**NOTE:** In order for switches to operate as described above, our BLE Switch Module should be mounted, and please make sure the “I” label is placed above the “O” label.




## BLE Kinetic Push Button Switch

SR-SBP2801K4-BLE(US)

Technology Partner  
**SILVAIR** Work with Silvoir



### Installation

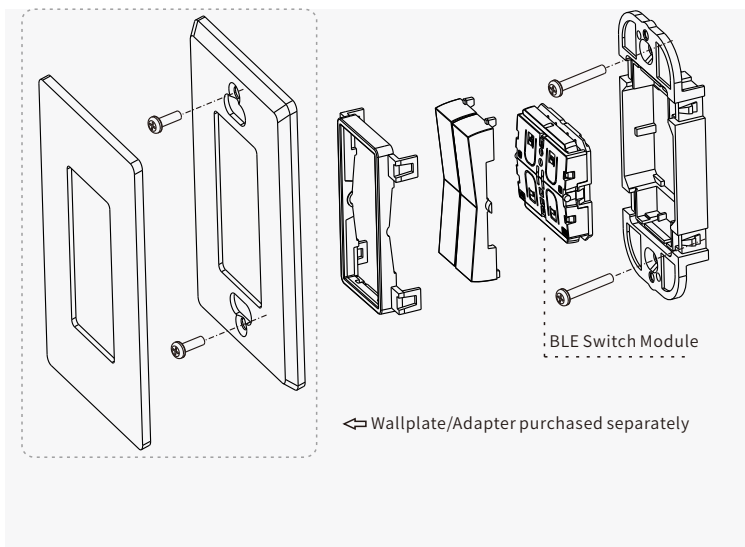

### Warning

- DO NOT expose the device to moisture.

### Operation

- Kindly refer “Silvoir Commissioning User Manual” for further pairing, grouping, scene settings.
- Kindly refer “Silvoir Kinetic Switch Keypad User Manual” to go further pairing, grouping, scene settings.
- Press and hold down the “Reset” button on the controller over 5 seconds until the indicator flashes , which means it has been reset.

### Application

