



Technology Partner
SILVAIR

Work with Silvair

0-10V BLE PIR Sensor Controller with 3.5mm Audio-Jack Interface

SR-SV9035AJ-PIR-V

Features


- Bluetooth to 0-10V signal PIR sensor controller, Bluetooth® mesh network
- Mesh network, which has a much longer control distance, transmits received signals to neighboring devices
- All devices on 0-10V line are broadcast controlled by mobile application
- Supporting our kinetic energy switches and EnOcean switches EWSSB and EWSDB
- In typical indoor environment, the typical range for wireless communication is 20m to 25m . Actual range is dependent on field installation.
- Standby power consumption less than 0.5W, meet latest ERP regulation
- Available with Magnetic reset (hold magnet at reset area for 5 seconds)
- Support sensitivity adjustment, Mesh Network, a better method to deal with false trigger
- 3.5mm audio-jack interface (plug & play)
- On-board antenna
- Waterproof grade: Ip20
- 5 years warranty



Parameters

Input	Power	12-24VDC
	Signal	Bluetooth
Output	Signal	0-10V
	Dimming Curve	Logarithmic
Control	Dimming Method	PWM
	Operating Temperature	0°C~+45°C
Environment	Relative Humidity	8% to 80%
	Size	See dimensions

Product info

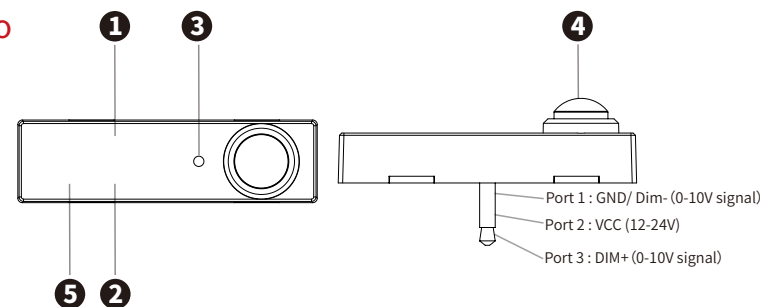


- ① **Green LED indicator (inside housing):** Flashes during commissioning
- ② **Red LED indicator (inside housing):** Flashes when motion is detected
- ③ **Light sensor:** Ambient light detection and daylight harvesting
- ④ **PIR lens**
- ⑤ **Magnetic reset area:** Hold the magnet near for 5 seconds until the green indicator starts flashing quickly, then remove it.




0-10V BLE PIR Sensor Controller with 3.5mm Audio-Jack Interface

SR-SV9035AJ-PIR-V

Dimension

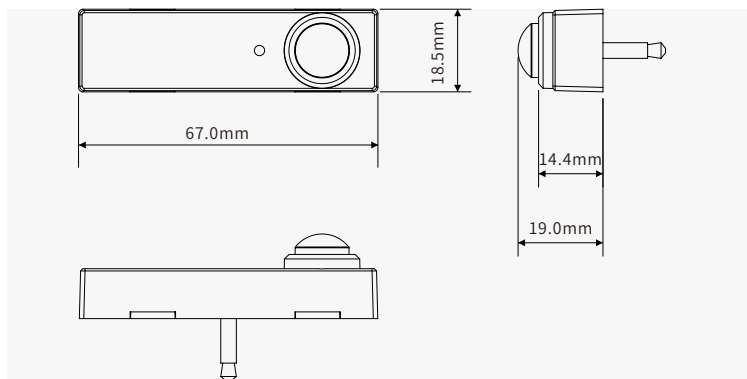

Wiring

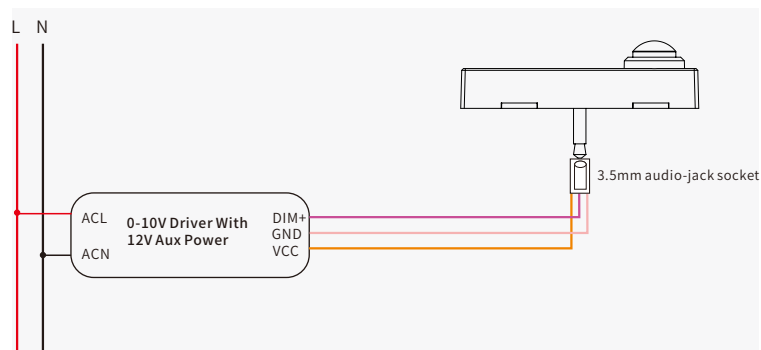

Note: please make sure the polarity of 0-10V signal of the sensor is correctly connected.

Operation


- Do wiring according to connection diagram.
- Kindly refer to “Silvair Commissioning User Manual” for further pairing.
- Available with Magnetic reset (hold magnet at reset area for 5 seconds)

Technology Partner
SILVAIR

Work with Silvair



Application

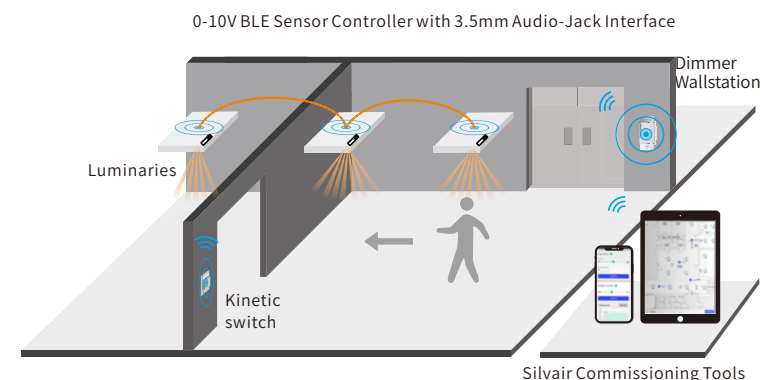

Specification

ENERGY SAVINGS

- Low/High-end trimming
- Daylight harvesting
- Occupancy/Vacancy detection
- Auto and advanced demand response programs
- Time-of-Day dimming schedule
- Energy monitoring

COMFORT & CONVENIENCE

- Advanced occupancy detections
- Light-level stability
- Configurable dim-and-linger occupancy
- Personalized setting profile
- Work with kinetic switch keypad and dimmer wallstation
- Multi-scenes control

SENSING

- Mounting height: 2.5m
- Detection area diameter: 5m @ 2.5m

ENVIRONMENT & APPROBATION




- Operating temperature: 0°C to 45°C
- Agency approbations: UL Listed /FCC/ CE/ IC...
- Warranty: 5 years





0-10V BLE PIR Sensor Controller with 3.5mm Audio-Jack Interface

SR-SV9035AJ-PIR-V

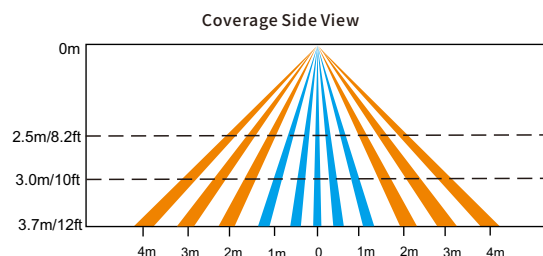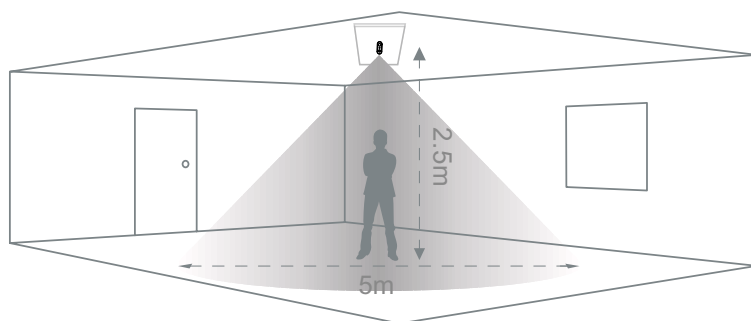Detection Pattern



The detection area for movement can be roughly divided into two parts:

-  Slow movement (person moving $< 1.0'/s$ or $0.3m/s$)
-  Quick movement (person moving $> 1.3'/s$ or $0.4m/s$)

Technology Partner

SILVAIR Work with Silvair



Installation Precautions

- Avoid areas with frequent temperature changes: Keep away from air conditioners, fans, refrigerators, ovens, and other objects that cause rapid temperature changes. The detection effectiveness of PIR motion sensors is closely related to temperature fluctuations, and vents or heat sources can lead to false alarms.
- Avoid areas with significant air flow.
- Avoid facing glass doors and windows directly: 1) Do not face glass doors and windows directly to avoid interference from strong light. 2) Avoid complex environments outside doors and windows, such as direct sunlight, crowds, and moving vehicles.
- Avoid installing opposite large, constantly moving objects: Large objects with significant motion can cause sudden changes in airflow within the detection area, leading to false alarms. Outdoor PIR motion sensors should not be installed opposite large trees or tall bushes.
- Avoid areas with screens, furniture, large potted plants, or other obstacles within the detection range.
- Avoid areas exposed to direct sunlight.

Update Log

Date	Version	Update Content	Update by
2025-7-18	V1.0	Initial Version	Romeo



Subject to change without notice. Please contact us if you have any questions.