

40W DALI DT6 NFC Enabled LED Driver(Constant Current)



Important: Read All Instructions Prior to Installation

Function introduction



Product Data

Output	LED Channel	1
	DC Voltage	10-54V, Max.60V
	Current	500-1050mA via NFC setting; Min.current gear lower to 0.1mA
	Current Accuracy	±3%@ full load
	Rated Power	Max. 40W
Input	Voltage Range	120-277VAC
	Frequency Range	50/60Hz
	Power Factor (Typ.)	> 0.97 @ 230VAC Full load*
	Total Harmonic Distortion	THD ≤ 13% (@ full load / 230VAC)*
	Efficiency (Typ.)	> 85% @ 230VAC full load*
	AC Current (Typ.)	0.3A Max.
	Inrush Current (Typ.)	Max. 9.38A at 230VAC; 96µs duration
	Leakage Current	< 5mA /230VAC
	Standby Power Consumption	< 0.5W
	Anti Surge	L-N:2KV
Control	Dimming Interface	DALI Device Type 6 (DALI consumption < 2mA)/ AC Push
	Dimming Range	0.01%-100%@ Max current
	Dimming Method	Amplitude/CCR dimming
	Dimming Curve	Linear/ Logarithmic optional

Protection	Short Circuit	Yes, recovers automatically after fault condition is removed
	Over Current	Yes, recovers automatically after fault condition is removed
	Over Temperature	Yes, recovers automatically after temperature drop
Environment	Working Temp.	-25°C ~ +60°C
	Max. Case Temp.	TC=90°C
	Working Humidity	10% ~ 95% RH non-condensing
	Storage Temp. & Humidity	-40°C ~ +80°C, 10% ~ 95% RH
Safety & EMC	Safety Standards	EN61347-1, EN61347-2-13, GB/T 19510.1-2023, GB/T 19510.213-2023
	Withstand Voltage	I/P-O/P: 3.75KVAC
	Isolation Resistance	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH
	EMC Emission	EN55015, EN61000-3-2, EN61000-3-3, GB 17625.1-2022, GB/T 17743-2021
	EMC Immunity	EN61547, EN61000-4-2,3,4,5,6,8,11
Others	MTBF	191350H, MIL-HDBK-217F @ 230VAC full load and 25°C ambient temperature
	Dimension	245x30x21mm (L*W*H)
	Warranty	5 Years

- \*: PF/THD/Eff shall be different per different testing setup and equipment.
- In compliance with IEC 62386-101:2014, IEC 62386-102:2014, IEC 62386-207 Ed2
  - Built-in DALI-2 interface, DALI DT6 device
  - Dimmable LED driver with linear metal housing. Max. output power 40W
  - 500-1050mA current selectable via NFC program tool. Min.current gear lower to 0.1mA
  - DALI Address/Group/Scene setting via NFC program tool.
  - Class II power supply, isolated design
  - High power factor and efficiency
  - To switch and dim LED lighting luminaries
  - Amplitude/CCR dimming, smooth and deep dimming
  - Compatible with universal DALI masters that support DT6 commands
  - DALI-251/252/253 Enabled
  - IP20 rating, suitable for indoor LED lighting applications
  - 5 years warranty

Safety & Warnings

- DO NOT install with power applied to the device.
- DO NOT expose the device to moisture.

Operation

With DALI master

1. DALI Address  
1 DALI address for 1 channel output are assigned by DALI Master controller automatically, please refer to user manuals of compatible DALI Masters for specific operations.

With NFC Programming devices

#### Note


1) Do wiring according to the wiring diagram and power on the DALI system .

2) Recommend setting parameters without power-on the DALI devices .

2) Please make sure your mobile phone has NFC function and enable it .

#### Working with “SR NFC Tool” APP

Step 1: Download the APP (searching “SR NFC Tool” from App Store and Google Play) .  
Then open the APP .

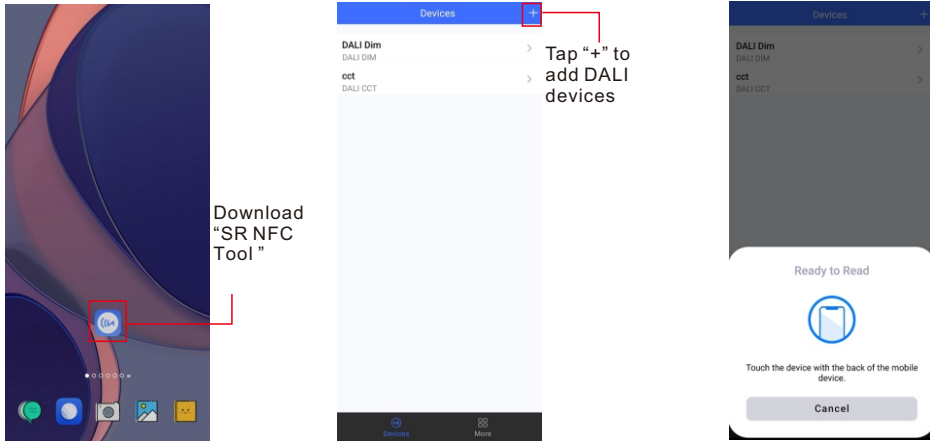

- Note:**
1. Please Make sure that you have enabled NFC function with your mobile phone/ tablet .
  2. Please Make sure that the “NFC position” is matched.
  3. Please do not power on the device before setting.
  4. If you can't download “SR NFC Tool”. Please contact with us.

Step 2: Add device, and name it as you wish.



Step 3: Unlock device, enter parameters configuring page.



- Note:**
1. You have to unlock the device then do some settings
  2. Only when the corresponding function is selected, the function interface will be displayed.

Step 4: Few parameter interface, you can choose the setting based on your requirements.



Step 5: After setting, please save the selected configuration via NFC and power on the device.



Tips

- 1. NFC function doesn't require any power driver.
- 2. Many functions can be configured by NFC. Kindly check your desired functions.
- 3. All of our DALI drivers are in the best performance within our DALI master/ gateway.

CLO AND CORRIDOR DIM(CD) FUNCTION INSTRUCTION


1.Open APP, and Find the CLO/CD functions



Read From the NFC Driver

Unlock it,and Click here to enter CLO settings

2.Enter CLO Setting homepage

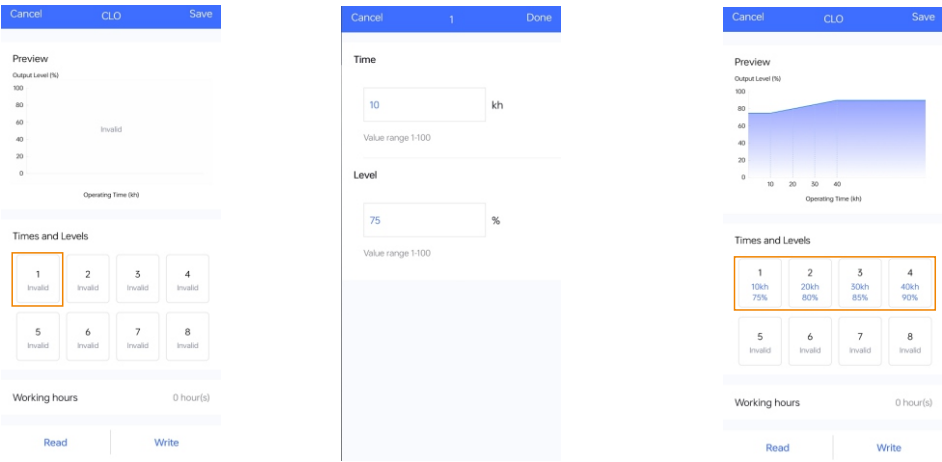

Enable CLO function


Click "1",and set its time and level

Set your desired time and levels.  
Graphic display

Tips:


Working hours : Ability to calculate the working hours of a single driver.

3.Corridor dim(CD) function

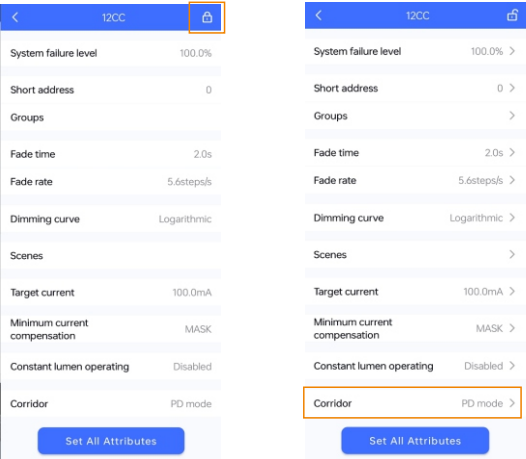

Read From the NFC Driver

Unlock it,and Click here to enter Corridor mode

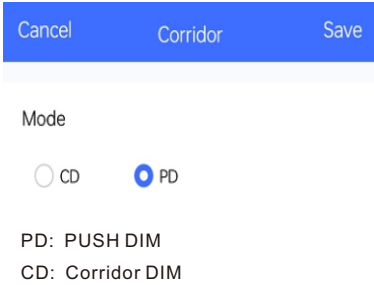

PD: PUSH DIM  
CD: Corridor DIM

## 4.Enter CD Setting homepage

Cancel Corridor Save

Mode

☒ CD ☐ PD

Preview

Fade in time

5 s

Value range 0-100

Occupied time

Read Write

Enter CD mode

### Tips:

1. You should select either CD mode or PD mode, but not both.
2. Under CD mode, you can realize it with normal (3rd party) AC sensor.
3. Default mode: PD mode.

## Additional Remarks

More

Write Consecutively ☐

Advanced >

App Version 1.0.10

Check for Update >

Privacy Policy >

Configurations More

1. Please make sure your APP version is 1.0.10 or higher.
2. Please make sure NFC driver's firmware is available with CLO / CD functions.

Cancel Corridor Save

Occupied time

120 s

Value range 0-60,000

Occupied level

100 %

Value range 0-100

Fade out time

5 s

Value range 0-100

Prolonged time

Read Write

Cancel Corridor Save

Prolonged time

60 s

Value range 0-60,000

☐ Infinite

Prolonged level

20 %

Value range 0-100

Dim to off time

5 s


Value range 0-100

Read Write


Set your desired time and levels.  
Graphic display

## Wiring Diagram

### 1. With DALI bus

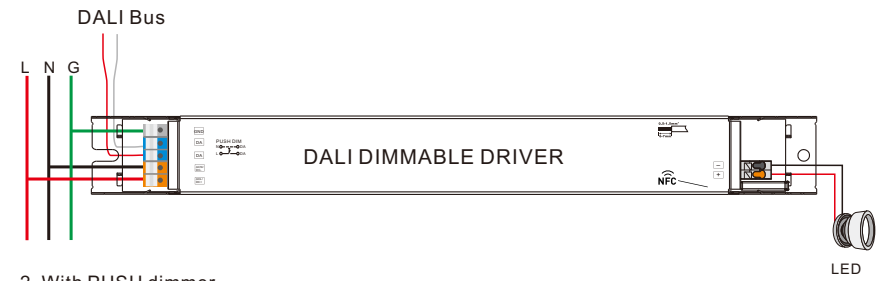

### 2. With PUSH dimmer

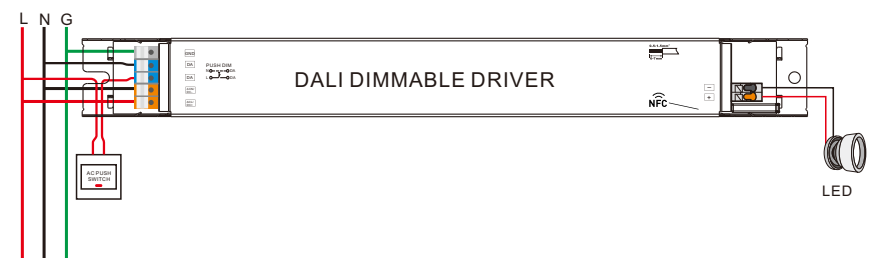


### AC Push Function

- 1) Click the button to switch ON/OFF
- 2) Press and hold down the button to increase or decrease light intensity to desired level and release it, then repeat the operation to adjust light intensity to opposite direction. The dimming range is from 1% to 100%.

## Product Dimension

### Without End Cap

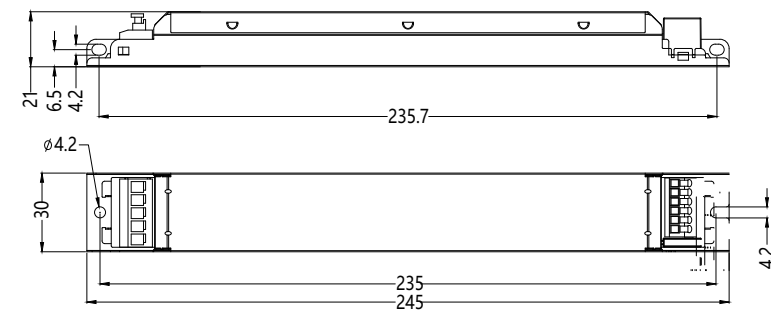

### With End Cap

