









Important: Read All Instructions Prior to Installation

#### **Function introduction**

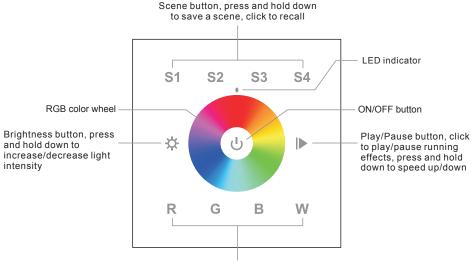

R, G, B, W channel, click to turn ON/OFF, press and hold down to increase/decrease light intensity

Front side

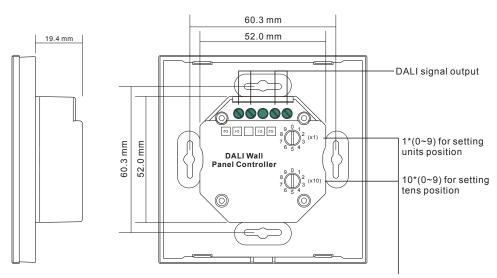

Rotary switches for setting start DALI address number (0-63), the number equals to tens position plus units position

# Back side

### **Product Data**


Output	DALI signal
Power Supply	Supply By DALI Bus
Operation Current	4mA
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	86x86x29.1mm
Waterproof grade	lp20

- · Touch sensitive.
- · Glass interface (white & black).
- · Comply to DALI standard protocol IEC 62386-102, IEC 62386-207 and in compliance with DALI products from other international incorporation.
- 1 light zone is available for switch, dimming and RGB color control, each zone can control 4 DALI addresses.
- Enable to set start DALI address number (0-63) for the 4 zones by rotary switches on the back.
- · Enable to save 4 scenes
- Built-in 8 Color Sequences

## Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

### Wiring diagram

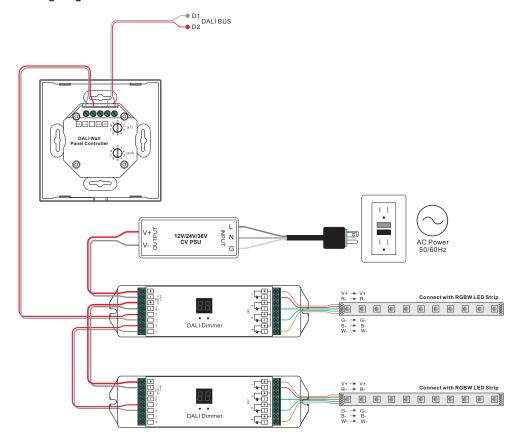

## Operation

Set start DALI address number for the light zone by rotary switches on the back: Set the number as X (0-63), the light zone will control DALI addresses X, X+1, X+2 and X+3. Note: if X is set as 63, the zone will control DALI address 63, 00, 01 and 02.

## Installation

