


Universal series RF & WiFi Waterproof Receiver

70020012



Important: Read All Instructions Prior to Installation

Function introduction

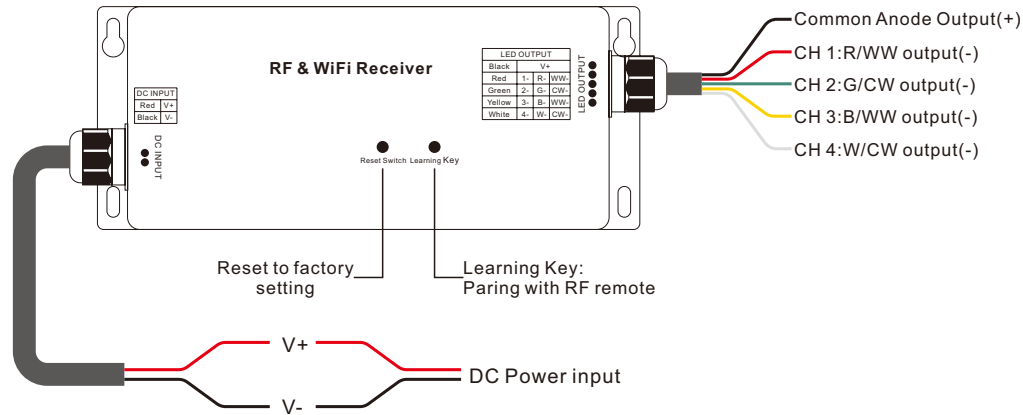

Product Data

No.	Input Voltage	Output Current	Output Power	Remarks	Size(LxWxH)
1	12-36VDC	4x5A	4x(60-180)W	Constant voltage	180.5x73.6x38mm
2	12-36VDC	4x350mA	4x(4.2-12.6)W	Constant current	180.5x73.6x38mm
3	12-36VDC	4x700mA	4x(8.4-25.2)W	Constant current	180.5x73.6x38mm

- Radio Frequency : 869.5/916.5/434mhz
- Waterproof grade: IP67

Safety & Warnings

- DO NOT install with power applied to device.
- This device is IP67 rating and protected against damp environment.

Pair/delete the pairing with RF remote


1. Do wiring according to connection diagram.
2. Pair RF Receiver with RF remote: please refer to the instruction of the remote that you would like to pair with.
3. Delete the pairing:
 - (1) Wire up the RF receiver correctly, power on.
 - (2) Press and hold down the **"Learning Key"** button on receiver for over 3 seconds until the connected light flashes, which means well deleted.

The WiFi receiver can be paired to both RF remote and IOS/Android smart phone. It can be controlled by both RF and WiFi signal.

IOS or Android system connection to the receiver:

Please check "EasyLighting" application manual. Default WiFi password: 0123456789

Wiring Diagram

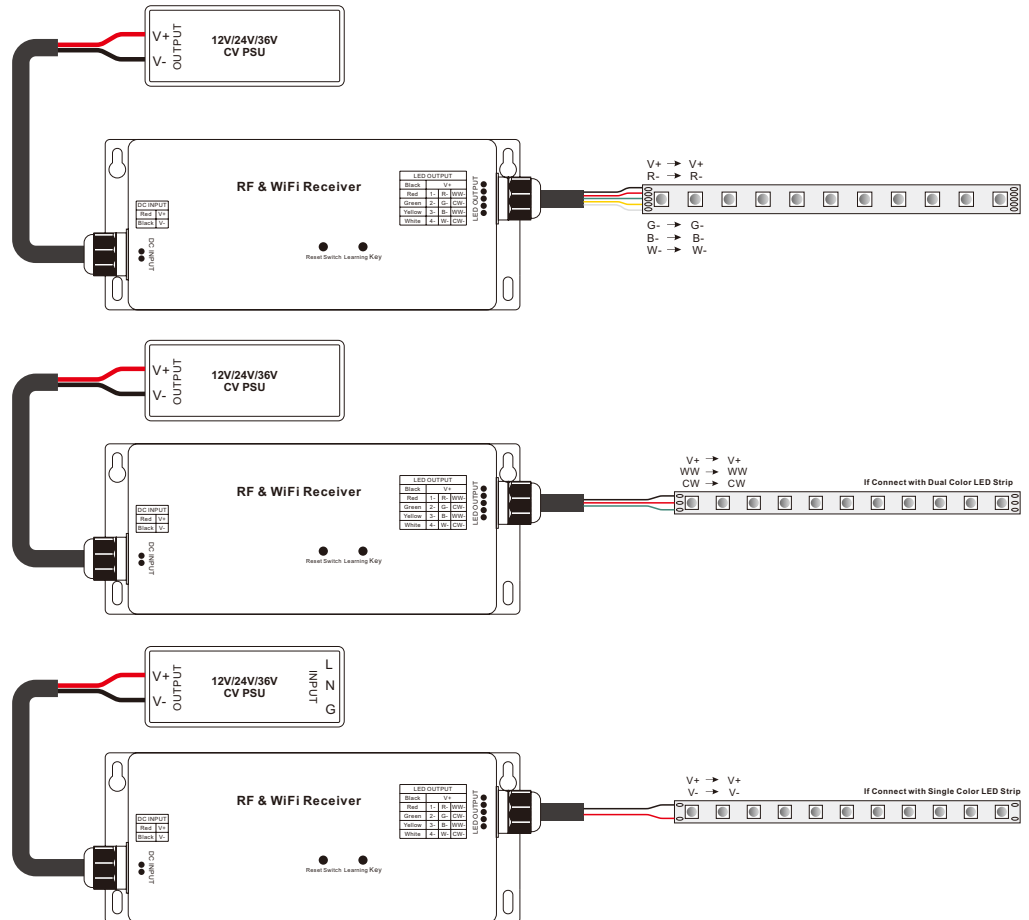

Product Dimension

