


# 4 in 1 Universal 2.4G Mesh LED Controller



**Important:** Read All Instructions Prior to Installation

## Function introduction

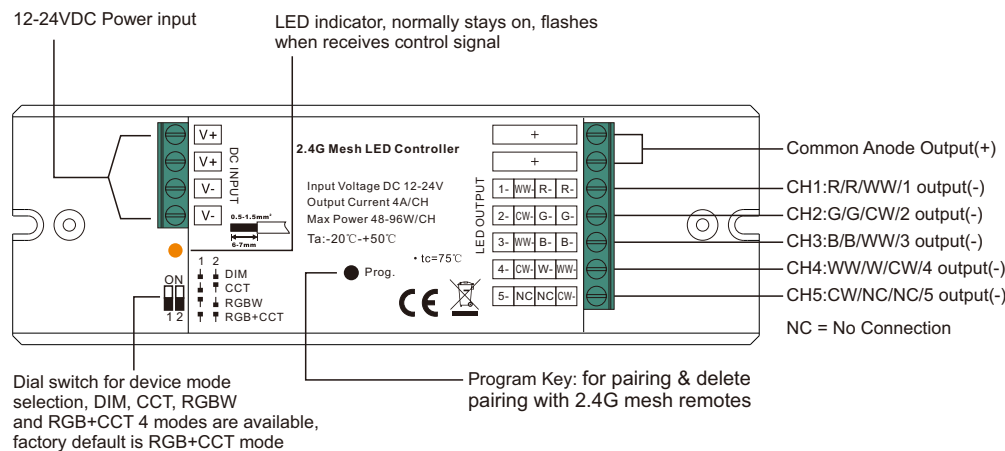

## Product Data

Input Voltage	Output Current	Output Power	Remarks	Size(LxWxH)	Ambient Temperature	Max. Casing Temperature
12-24VDC	4A/CH	48-96W/CH	Constant voltage	145x46.5x16mm	-20°C ~ +50°C	75

- 4 in 1 universal 2.4G mesh LED controller, radio frequency: 2.4GHz
- 4 different device modes DIM, CCT, RGBW and RGB+CCT in 1 controller, and selectable by dial switch
- Enables to control ON/OFF, light intensity, color temperature, RGB color of connected LED lights
- Ultra powerful to control Single Color, CCT, RGBW, RGB+CCT LED strips
- Controlled through both smart App and remote controls, no gateway required for local control
- The controller can be configured as six different light types: RGB+CCT, RGBW, RGB, CCT, DIM, ON/OFF using the smart APP
- Easy & quick pairing to the smart App by simply pushing the Prog. button
- Mesh network, much longer control distance, transmits received signal to neighbor devices
- Up to 30m transmission distance between every two neighbor devices
- Encrypted two-way communication, quick status feedback, safe & reliable data transmission
- Compatible with universal 2.4G mesh remotes, each LED controller can pair to max. 8 remotes
- Cloud control is available for remote access, works with Amazon Alexa and Google Home
- Waterproof grade: IP20



## Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT operate the dial switches for device mode selection with power applied to device.
- DO NOT expose the device to moisture.


## Operation

Do wiring according to connection diagram.

### Set LED controller into pairing with 2.4G mesh remote mode

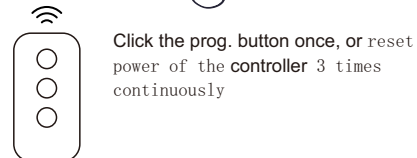
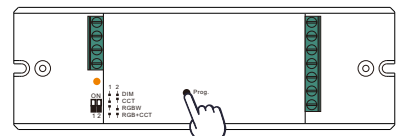


### Reset the LED Controller to factory setting

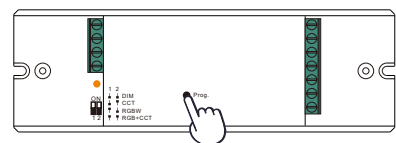

Press and hold down the “Prog.” button on the controller for over 3 seconds (or reset power of the device 8 times continuously), the connected light flashes, which means well reset

### Set LED controller into pairing with HomeLife APP

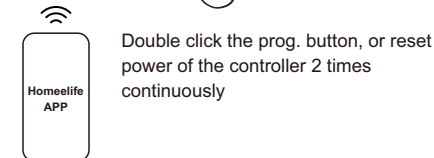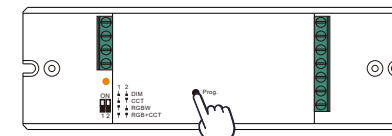

### Download and Install App

Download “HomeLife” app from App Store or Google Play or scan the QR codes below. Follow the direction in the app to connect your devices properly.




IOS QR Code



Android QR Code


## Wiring Diagram

### 1) RGB+CCT Mode

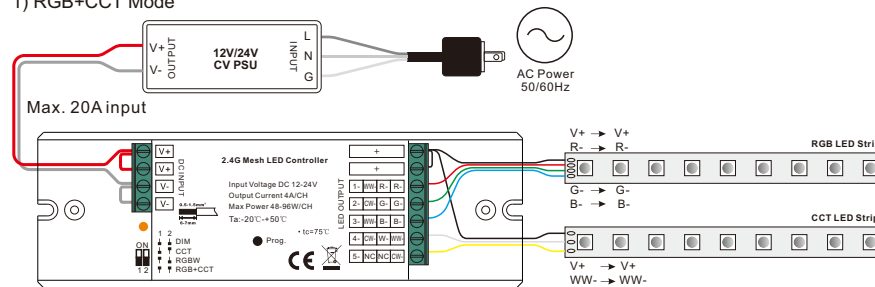


**Note:** please make sure the dial switches are at position for RGB+CCT mode as shown in above diagram.

### 2) RGBW Mode

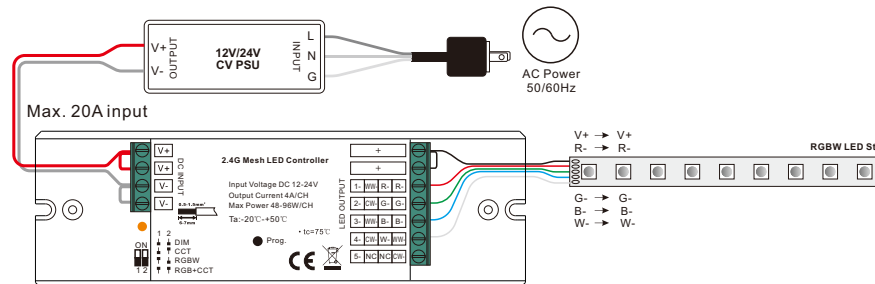


**Note:** please make sure the dial switches are at position for RGBW mode as shown in above diagram.

### 3) CCT Mode

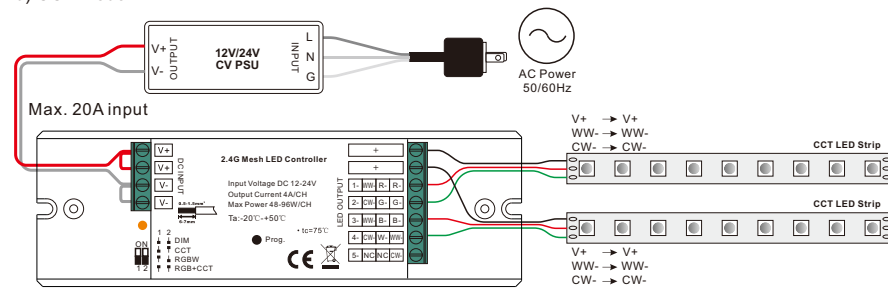

**Note:** please make sure the dial switches are at position for CCT mode as shown in above diagram.

### 4) DIM Mode

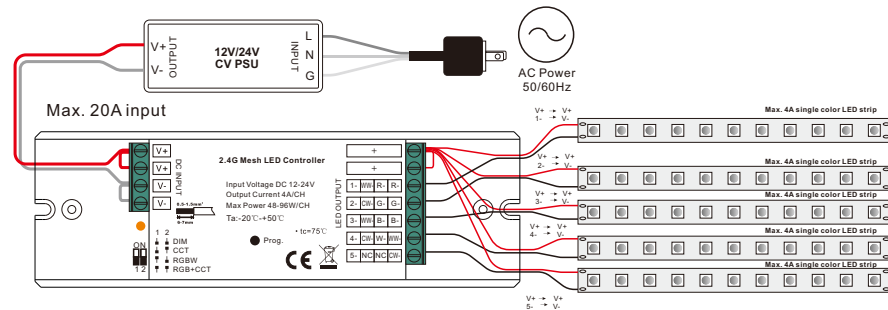

**Note:** please make sure the dial switches are at position for DIM mode as shown in above diagram.

### Product Dimension

