

Wall Mounted DMX512 Master

SR-2830ADMX



Feature


- Backlight
- Glass interface(White & Black)
- Touch sensitive
- Adjust brightness




Parameter

Part No.	Input Voltage	Output	Size
SR-2830ADMX	12-24VDC	DMX512 Signal	86x86x29.1


Product Size

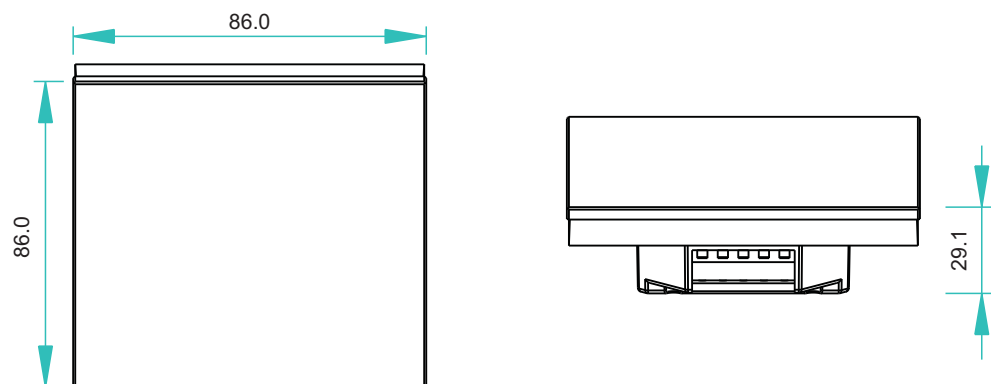


Installation

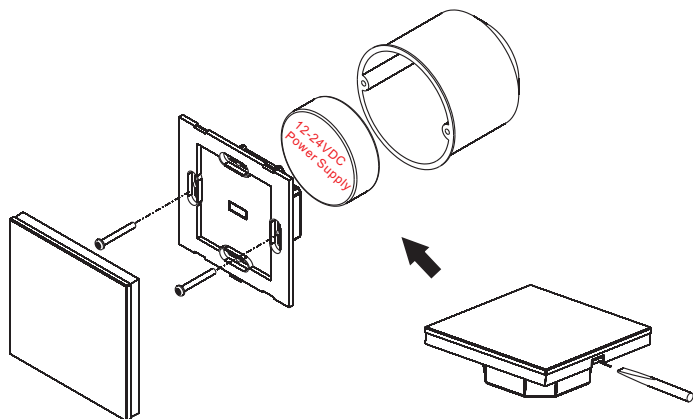

Wiring diagram

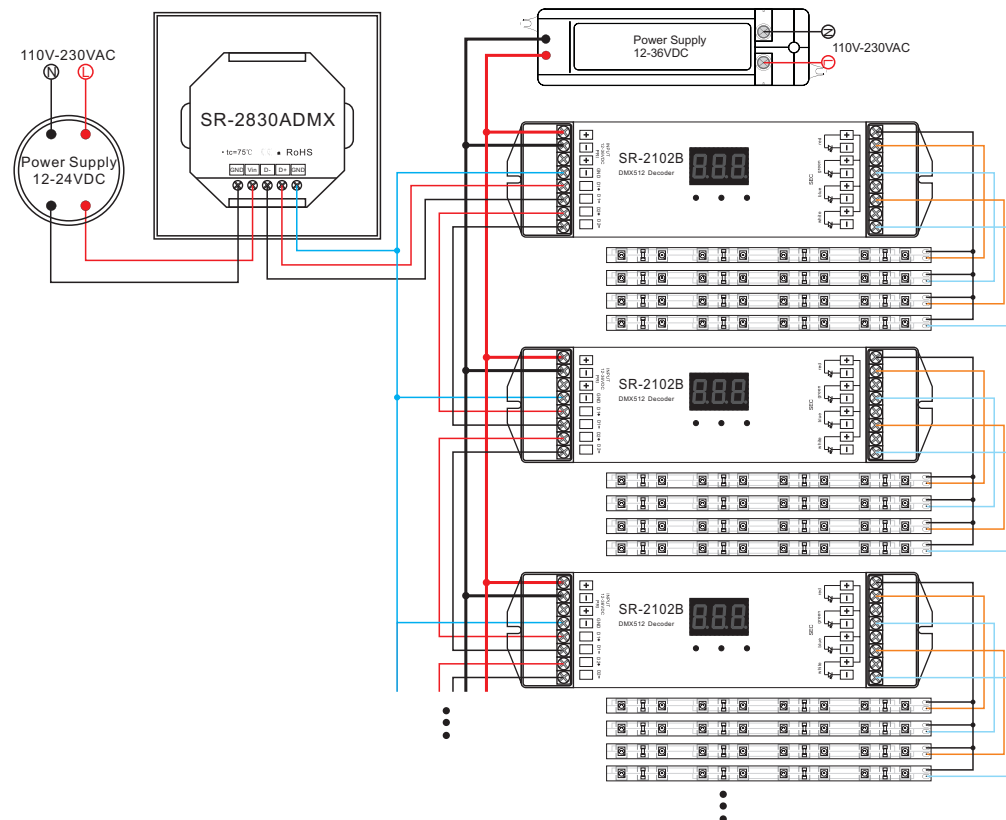

Description of buttons

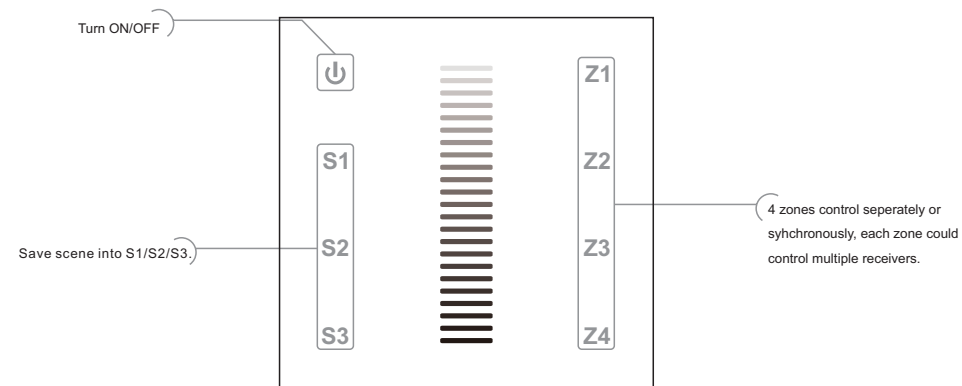

Operation

1.how to operate zone button

After connect well with DMX decoders, please set the DMX decoders address as below:
DMX decoder's address 001 is controlled by Zone 1
DMX decoder's address 005 is controlled by Zone 2
DMX decoder's address 009 is controlled by Zone 3
DMX decoder's address 013 is controlled by Zone 4

Touch zone button Z1/Z2/Z3/Z4 separately over 2 seconds, which will turn ON/OFF separately.
The backlight blue is ON for the zone, yellow is OFF for the zone.

2. Save and replay

Save: Touch dimming slider to get a color→
Hold any button of S1,S2 or S3 over 2 seconds(4zones work together)
The light flick means successfully saved.

Replay: Short touch button S1,S2 or S3 →Replay the scene just saved.

Safety & Warnings

- 1) The product shall be installed and serviced by a qualified person.
- 2) IP20.Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- 3) Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- 4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- 5) Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- 6) Please ensure that the cable is secured tightly in the connector
- 7) For update information please consult your supplier.

Warranty Agreement

- 1) We provide lifelong technical assistance with this product:
 - 5-year warranty. We print date on every products, for example :1125 means year 2011,week 25.The warranty is for free repair or replacement and covers manufacturing faults only.
 - For faults beyond the 3-year warranty we reserve the right to charge for time and parts.
- 2) Limited Warrenty
 - Any defects caused by wrong operation.
 - Any damages caused by unauthorized removal, maintenance, modifying, incorrect connection and replacement of chips.
 - Any damages due to transportation, vibration etc. after purchase.
 - Any damages caused by earthquake, fire, lightning, pollution and abnormal voltage.
 - Any damages caused by negligence, inappropriate storing at high temperatures and humidity or near harmful chemicals.
 - Product has been updated
- 3) Repair or replacement as provided under this warranty is the exclusive remedy to the customer.