


RF Wall Mounted Touch Panel

SR-2830RGBDMX

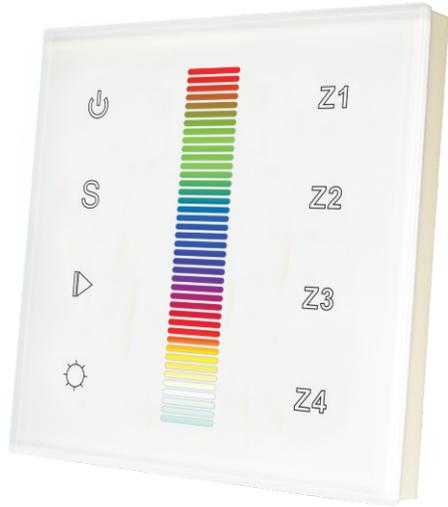

Feature

- Backlight, find in the dark
- Glass interface(White & Black)
- Touch sensitive
- Adjust brightness and color





Parameter


Remote

Part No.	Operation Voltage	Operation Frequency	DIMENSIONS ø/h (mm)	Remarks
SR-2830RGBDMX	12-24VDC	434MHz/868MHz	86x86x29.1	Touch Sensor


Product Size

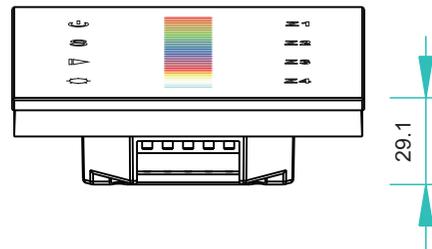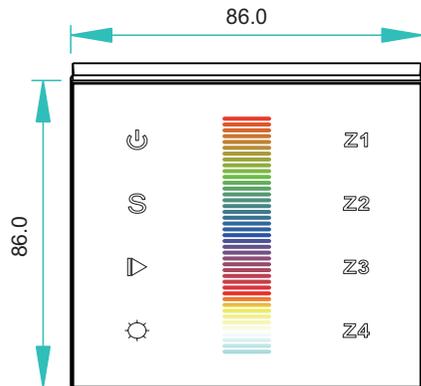


Wiring diagram

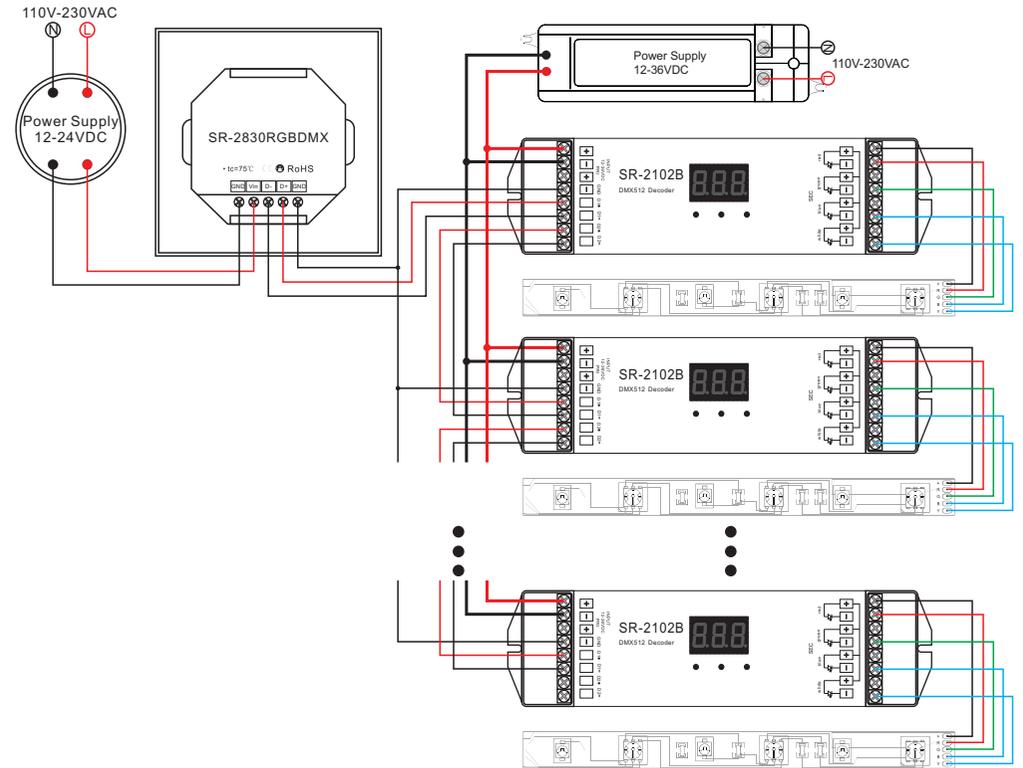

Installation

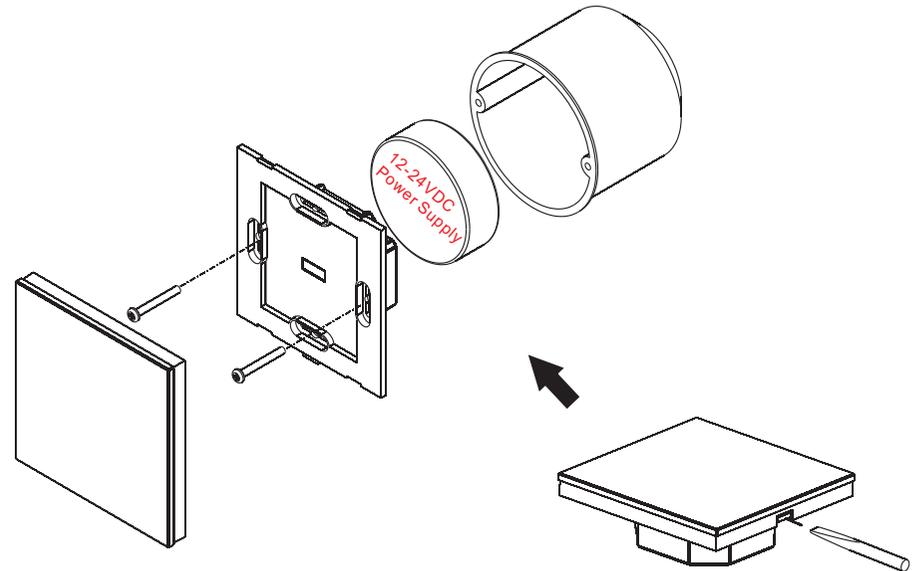

Description of buttons

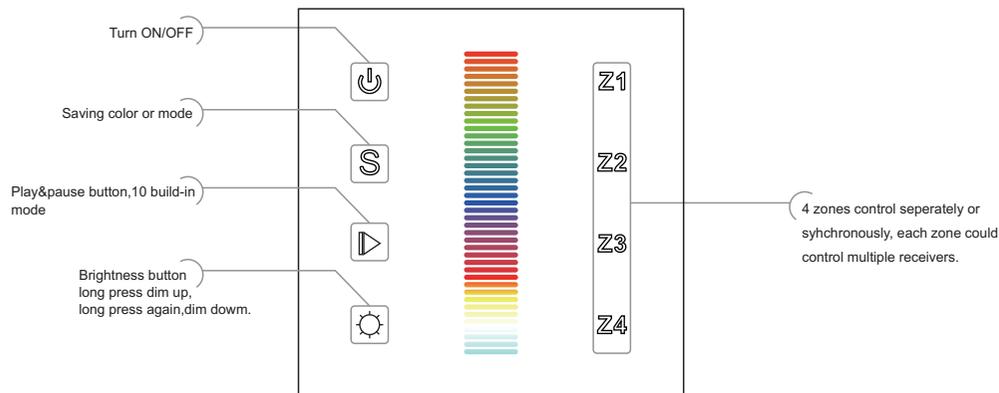

Operation

Z1 Z2 Z3 Z4 Short press is choose the zone.
Long press can turn off/on each zone.

- S** a. Save color :choose a zone or multiple zones from(Z1,Z2,Z3,Z4) →
Touch dimming slider to get a favorite color →
Hold **S** button over 2 seconds →
The light flicking means successfully saved.
- b. Save mode:choose a zone or multiple zones from(Z1,Z2,Z3,Z4) →
press **▶** button, 10 build-in modes inside, choose the favorite mode →
Hold **S** button over 2 seconds-The light flicking means successfully saved.
- c. Reply:Short touch button **S** to replay the color or mode just saved.

▶ Press **▶** Button, mode will run. Press it once, it runs one mode. Press button again, it stops, then press one more time, it will enter next mode. There are total 10 build-in modes.

☀ Long press dim up, Long press again, dim down.

Safety & Warnings

- 1) The product shall be installed and serviced by a qualified person.
- 2) IP20. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- 3) Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- 4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- 5) Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- 6) Please ensure that the cable is secured tightly in the connector
- 7) For update information please consult your supplier.

Warranty Agreement

1) We provide lifelong technical assistance with this product:

- 5-year warranty. We print date on every products, for example :1125 means year 2011, week 25. The warranty is for free repair or replacement and covers manufacturing faults only.
- For faults beyond the 5-year warranty we reserve the right to charge for time and parts.

2) Limited Warranty

- Any defects caused by wrong operation.
 - Any damages caused by unauthorized removal, maintenance, modifying, incorrect connection and replacement of chips.
 - Any damages due to transportation, vibration etc. after purchase.
 - Any damages caused by earthquake, fire, lightning, pollution and abnormal voltage.
 - Any damages caused by negligence, inappropriate storing at high temperatures and humidity or near harmful chemicals.
 - Product has been updated
- 3) Repair or replacement as provided under this warranty is the exclusive remedy to the customer.