




Lutron AthenaWireless Node Compatibility Reference

Without End Cap (Built-in)

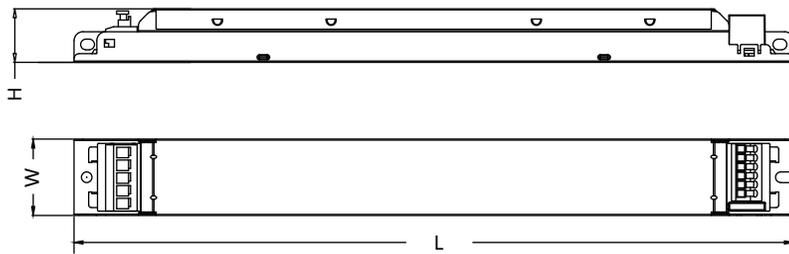


With End Cap (30/40W):
11.13" x 1.18" x 0.83" (282.6 x 30 x 21)

With End Cap (50/60W):
12.7" x 1.18" x 0.83" (322.6 x 30 x 21)


With End Cap (80W):
15.46" x 1.18" x 0.83" (392.6 x 30 x 21)

With End Cap(Independent)

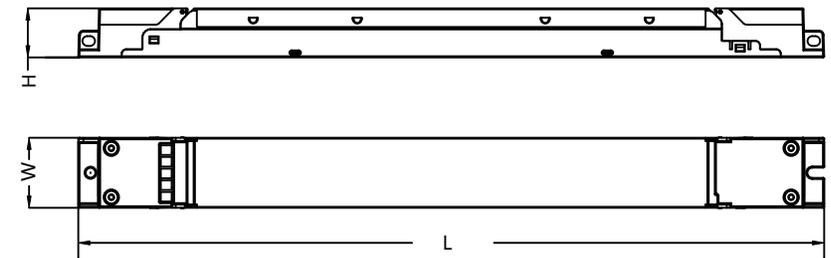


DALI System (D4i Version)											
Product Info			Electrical Parameters								
Model Number	Dimming Protocol	Input Voltage	Output Channel	Output Current	Output Voltage	Dimming Range	Dimming Method	Certification	Dimensions	Characteristics	Product Links
									Length x Width x Height in (mm)		
SRPL-2305iN-30CC250-850U	DALI DT6	120-277VAC	1	NFC(250-850)	10-54V	0.1-100%	CCR/AM	UL Listed/ UL Class P	9.64x1.18x0.83 (245x30x21)	DALI-2 DAL251/ 252 /253 Enabled DALI D4i certified Max.53mA DALI BUS Integrated	
SRPL-2309iN-30CCT250-850U	DALI DT8		2	NFC(250-850)	10-54V	0.1-100%	CCR/AM				
SRPL-2305iN-40CC500-1050U	DALI DT6	120-277VAC	1	NFC(500-1050)	10-54V	0.1-100%	CCR/AM	UL Listed/ UL Class P			
SRPL-2309iN-40CCT500-1050U	DALI DT8		2	NFC(500-1050)	10-54V	0.1-100%	CCR/AM				
SRPL-2305iN-50CC650-1300U	DALI DT6	120-277VAC	1	NFC(650-1300)	10-54V	0.1-100%	CCR/AM	UL Listed/ UL Class P	11.22x1.18x0.83 (285x30x21)	DALI-2 DAL251/ 252 /253 Enabled DALI D4i certified Max.53mA DALI BUS Integrated	
SRPL-2309iN-50CCT650-1300U	DALI DT8		2	NFC(650-1300)	10-54V	0.1-100%	CCR/AM				
SRPL-2305iN-60CC900-1700U	DALI DT6	120-277VAC	1	NFC (900-1700)	10-54V	0.1-100%	CCR/AM	UL Listed/ UL Class P			
SRPL-2309iN-60CCT900-1700U	DALI DT8		2	NFC (900-1700)	10-54V	0.1-100%	CCR/AM				
SRPL-2305iN-80CC1000-2000U	DALI DT6	120-277VAC	1	NFC (1000-2000)	10-54V	0.1-100%	CCR/AM	UL Listed/ UL Class P	13.98x1.18x0.83 (355x30x21)	DALI-2 DAL251/ 252 /253 Enabled DALI D4i certified Max.53mA DALI BUS Integrated	
SRPL-2309iN-80CCT1000-2000U	DALI DT8		2	NFC (1000-2000)	10-54V	0.1-100%	CCR/AM				

DIM (Single-color)

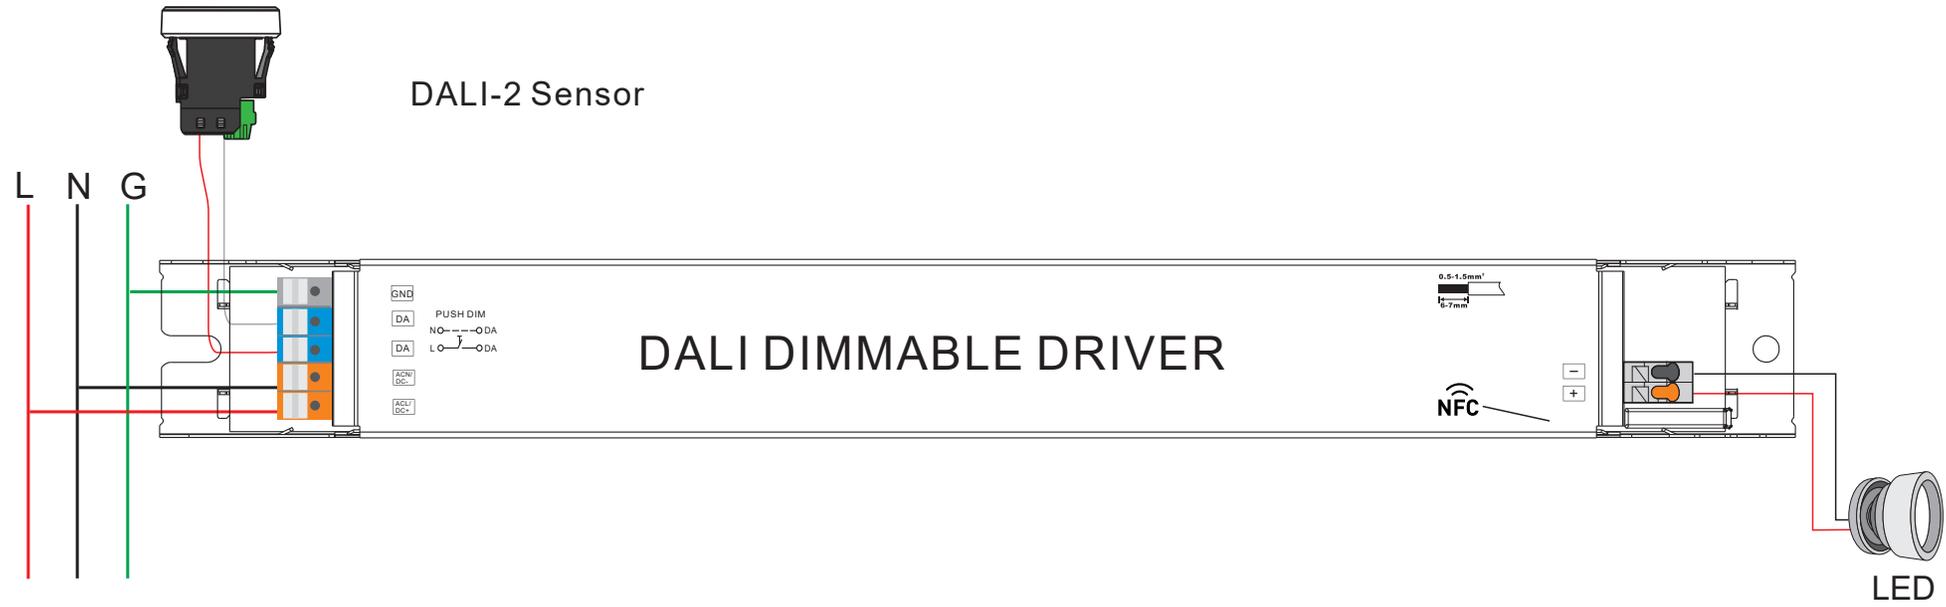

CCT (Tunable-white)

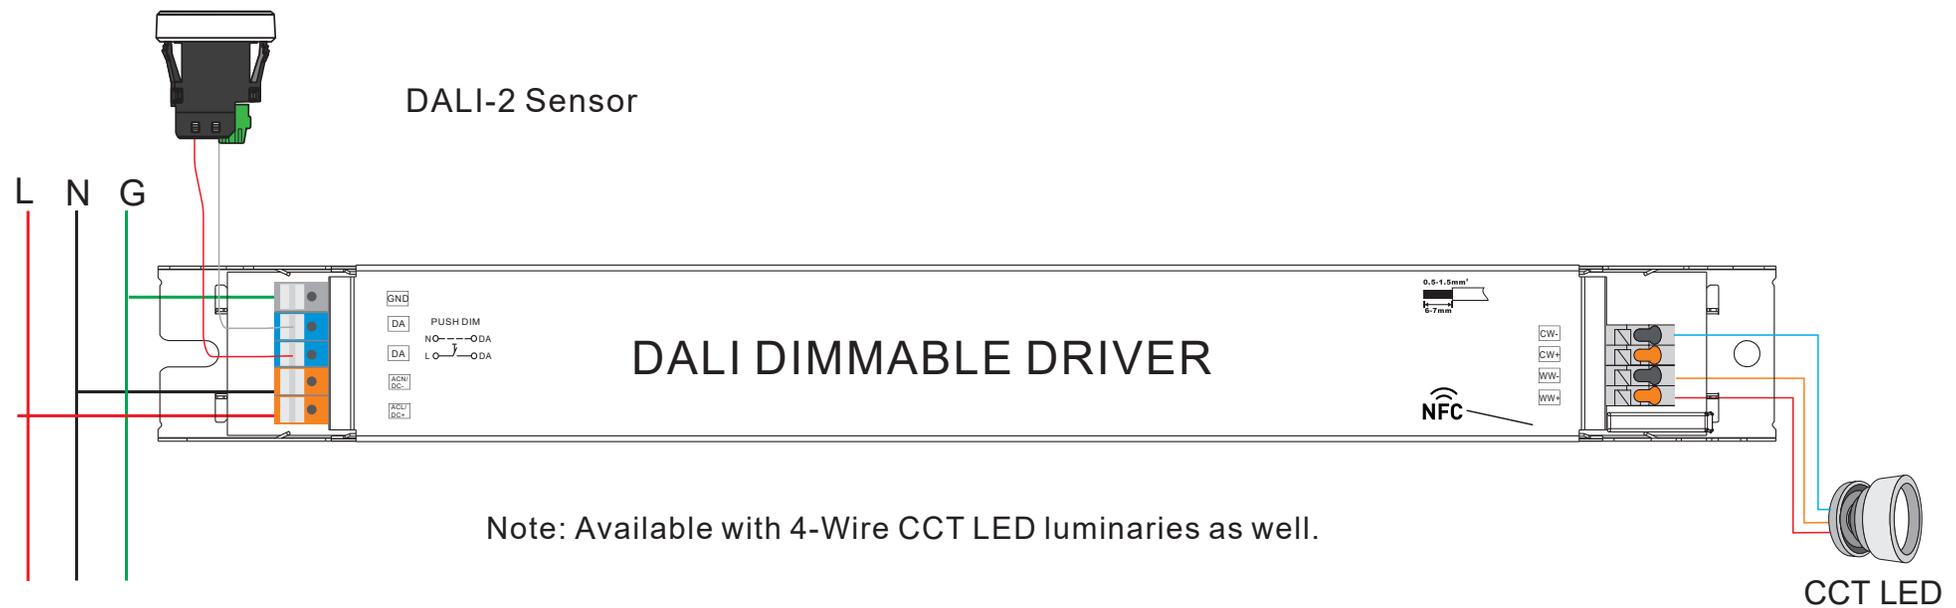



No Extra Power Supply

Driver provides internal Power supply to the sensor.
No auxiliary power required.

Compatible with Lutron


Driver working smoothly with Lutron Athena Node.

Emergency Support

Discharge completely within 4 seconds of power being removed from the fixture (Both when the fixture is on and off).

Bi-directional

Free to use the mobile application to check the power consumption.

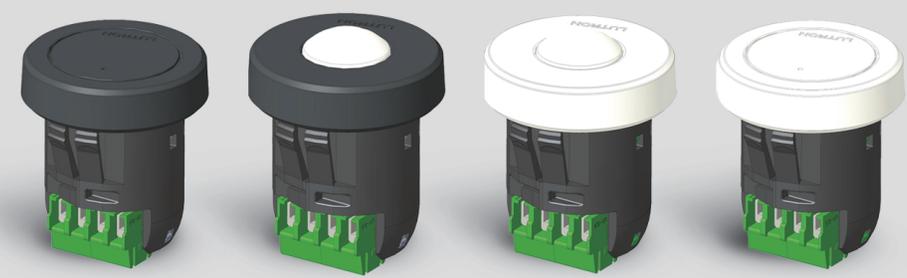




DALI D4i NFC

1/2CH Constant Current Driver

SR-Data+ 250/251/252/253



Linear Slim Enclosure Series 30W 40W 50W 60W 80W

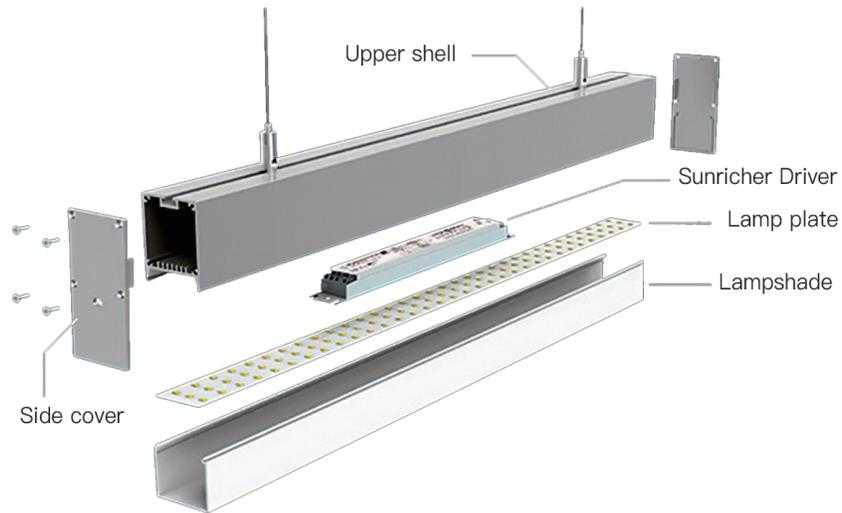

Absolutely No Flicker

0.1mA

0.1mA per gear of Current Selecting

0.1%

0.1% Depth & Smoothness Dimming

EL

Emergency Lighting



Constant Lumen Output



Corridor Dim



NFC Function



Master/Gateway/Driver One-stop Solutions



0% loss of DALI address after endurance testing per IEC 62384



Setting Via NFC



Target Current



DALI Address



Group Setting



Scene Setting



Dimming Curve



Power Up Level



System Failure Level



Fade Rate/Time