



DALI RGBW Touch Controller

09.230WU6.04158



Important: Read All Instructions Prior to Installation

Function introduction

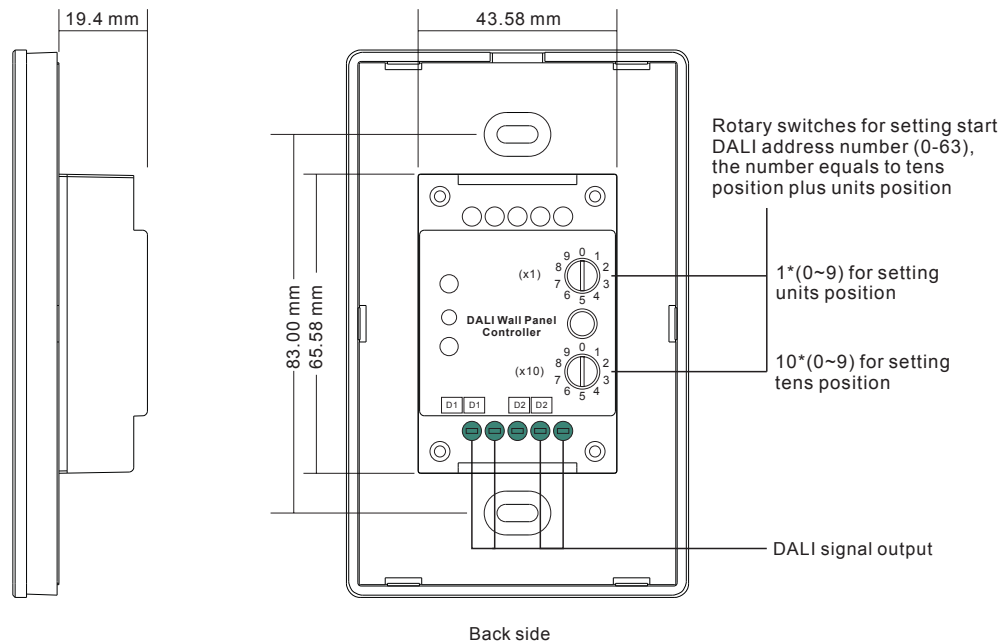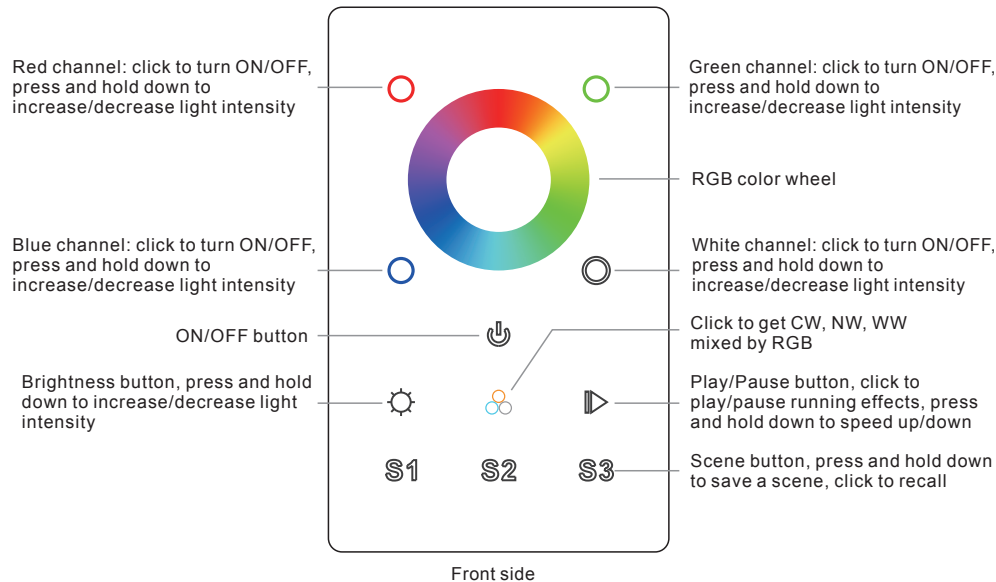

Product Data


Output	DALI signal
Power Supply	Supply By DALI Bus
Operation Current	4mA
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	75x120x29.1mm
Waterproof grade	Ip20

- Touch sensitive.
- Glass interface(white & black).
- Comply to DALI standard protocol IEC 62386-102, IEC 62386-207 and in compliance with DALI products from other international incorporation.
- 1 light zone is available for switch, dimming and RGB color control, each zone can control 4 DALI addresses.
- Enable to set start DALI address number (0-63) for the 4 zones by rotary switches on the back.
- Built-in 8 Color Sequences

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Wiring diagram

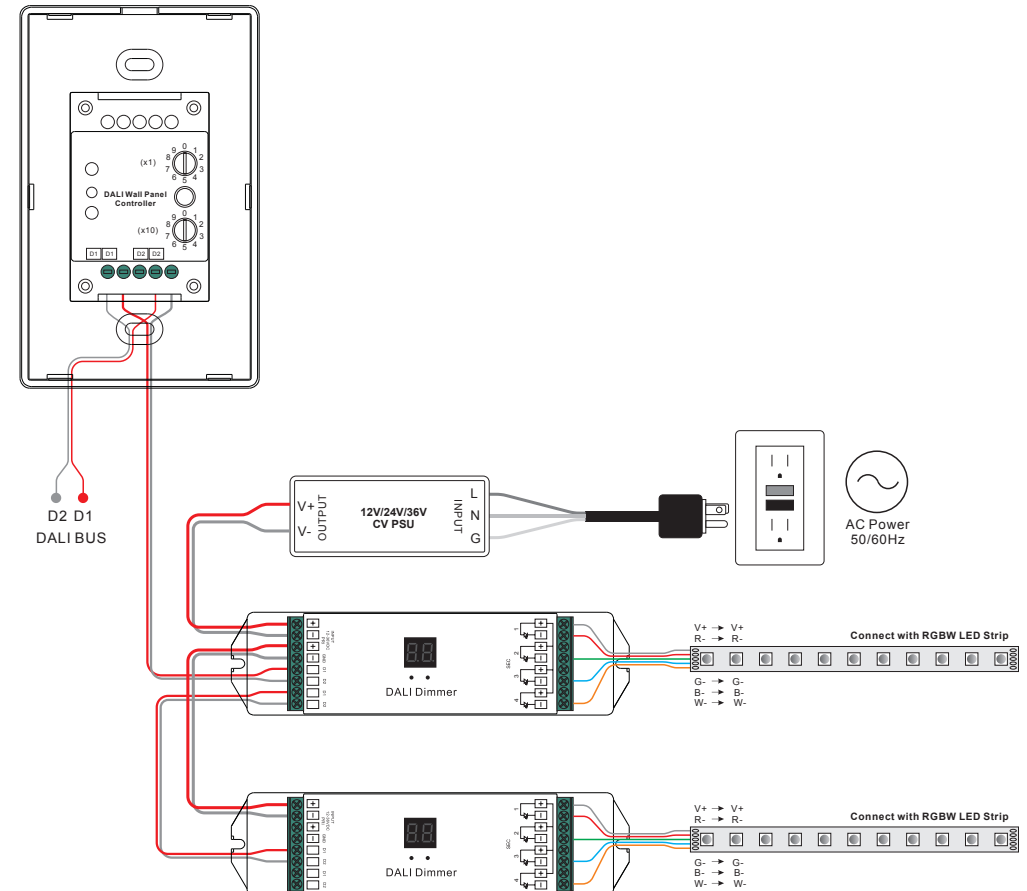

Operation

Set start DALI address number for the light zone by rotary switches on the back:

Set the number as X (0-63), the light zone will control DALI addresses X, X+1, X+2 and X+3.

Note: if X is set as 63, the zone will control DALI address 63, 00, 01 and 02.

Installation

